

Top-Deals 2025







Water pump pliers

The BRINKO pipe wrench BRIpowerXL with slip joint for larger pipe diameters and large-edged screw connections fits in every tool case despite its large diameter.

The maximum lever arm greatly facilitates work thanks to the optimum force transmission. The setting is made using an INOX pushbutton directly on the workpiece, and is extremely easy compared to a pipe wrench. The BRIpowerXL has a hand-friendly handle setting with finger clamp protection.

- · Chrome-Vanadium-Steel, chrome-plated
- Grip surfaces are hardened inductively
- · INOX pushbutton and spring
- · Self-clamping to tubes and nuts
- · With finger clamp protection
- · Anti-slip handles, soft dip-insulated, yellow
- · With pushbutton single-and adjustment
- · 27-level fine adjustment

Art. no. 687/150

Ø 1 1/4 Inch

Art. no. 687/180

Ø 1 ½ Inch





Art. no. 687/250

Ø 2 Inch

Art. no. 687/300

Ø 2 ¾ Inch



Art. no. 687/400

Ø 3 1/2 Inch



Art. no.	 • • 	‡○ mm	‡○mm	‡O "
687/150	150	30	32	1 1/4
687/180	180	36	40	1 1/2
687/250	250	46	50	2
687/300	300	60	70	23/4







Water pump pliers

- · Chrome vanadium steel
- · heavy-duty design
- high quality hardened and tempered
- · Induction hardened gripping teeth
- with box joint
- · Finger pinch protection
- · jaws and joint bright ground
- · Hammer finish, yellow lacquered

Art. Nr. 685/175 Ø 1 ²/₇ Zoll

Art. Nr. 685/240 Ø 1 4/7 Zoll

Art. Nr. 685/300

Ø 2 Zoll



Art. Nr.	-	‡○ mm	‡Omm	‡O "
685/175	175	32	33	1 2/7
685/240	240	39	40	1 4/7
685/300	300	52	53	2

Water pump pliers | automatic

- · Chrome vanadium steel
- · nose brightly polished
- · soft dip insulated anti-slip handles, yellow
- automatic jaw width adjustment bysimply sliping handles together, without snap adjustment
- · with finger pinch protection
- · patented technology



Art. no.	I I	‡○ mm	‡○mm	‡0"
682/250	250	42	46	1 1/2

Art. no. 682/250

Ø 1 ½ Inch



Fittings pliers | Key pliers

- · Chrome vanadium steel, matt chrome-plated (no rusting)
- · with push-button one-hand adjustment
- with finger pinch protection, one parallel gripping and one movable jaw
- · Smooth, polished gripping surfaces, induction hardened
- · Non-slip handles, soft, double dip-insulated, yellow
- · reduced weight
- · 10-fold hand force
- · replaces open-end spanner set



Ø 1 7/16 Inch

Art. no. 689/240

Ø 2 Inch



Art. no. 689/300

Ø 1 7/16 Inch



- · 10 times hand force
- · replaces open-end wrench set

Art. no.	4 →	‡⊜ mm	‡O "
689/180	180	36	1 7/16
689/240	240	50	2
689/300	300	68	2 1/2











Corner pipe pliers

- · Chrome vanadium steel, forged
- · special hardened teeth
- S-opening, polished
- finger pinch protection

Art. no.	-	‡○mm	‡0"
619/1	320	0 - 49	1
619/11/2	440	0 - 68	1 1/2
619/2	560	0 - 85	2

Art. no. 619/1

Ø 1 Inch

Art. no. 619/11/2


Ø 1 ½ Inch



Art. no. 619/2

Ø 2 Inch



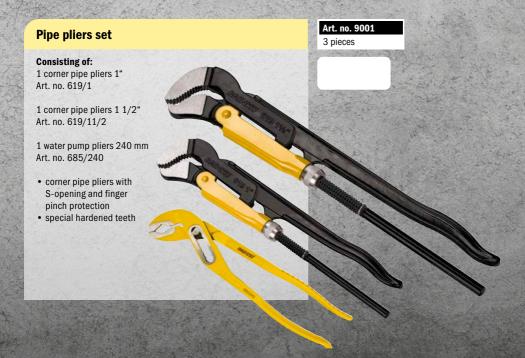

Ratchet wrenches 4 in 1

4 in 1

The ratchet wrench handles 4 different nut sizes

- Sizes: 10 x 13 mm and 17 x 19 mm
- finely toothed 72 teeth of the 2 ratchets ratchets can be switched to clockwise/counterclockwise operation
- · due to 12-slided toothing, the wrench easily grips 4, 6 and 12-sided screws as well as almost round nuts
- Chrome-vanadium steel, chrome-plated
- · extremely robust

Art. no. 83 Length 200 mm 4in1




Hanger bolt driver



Art. no. 102/8 Ø8 mm

Art. no. 102/10 Ø 10 mm



- · Screw-in and screw-out tool hanger bolt driver Ø 8 mm and Ø 10 mm
- · self-clamping when turned
- · for fast and effortless screwing and unscrewing of stay bolts, express and hanger bolts without damaging the thread
- · with hexagonal driver for power tools













Step wrench set

- 1 reversible ratchet Art. no. 672/265
- 1 step wrench, 105 mm Art. no. 673/105 with 9 levels 8.0, 9.5, 9.8, 11.8, 12.8, 13.8, 16.8 21.5, 22.0
- · supplied in DIY pouch



Length 105 mm





1/2"

Combination angle valve key

1/2"

The right tool, especially in tight spaces.

For damage-free installation of combination angle valves, which, in addition to connecting a mixer tap, also have an outlet for items like a dishwasher or washing machine.

1/2' ratchets Art. 129-3/250 are used for the drive.

Art. no. 659-1

1/2" Ratchet





Sleeve extractor set

For the extraction of threaded pipe connections, sleeves and

- · Left-hand extractor
- · CrV-steel, hardened
- · Surface burnished
- · Polished cutting surface

The service life of the extractors varies depending on the hardness of the counter material.

Knock the extractor into the drill hole and loosen the screw.

Content:

- 1 sleeve extractor 3/8"
- 1 sleeve extractor 1/2" 3/4"
- 1 hexagonal insert 1/2", size 26
- 1 hexagonal insert 1/2", size 19
- 1 reversible ratchet, inner and outer square drive bit, 1/2" drive



5 pieces













Handwheel socket BRIwheelNut

1/2"

.

Special tool with bars that can engage in the openings of handwheels and is driven by a 1/2' ratchet!

Now even the most stubborn blockages can be removed with ease!

A problem that every craftsman in the plumbing and heating industry knows!

In the field of domestic water or heating supply, a component must be replaced. In order to facilitate this, shut-off devices such as valves or slide valves were installed in front of replaceable components during construction.

Now such a component as a water meter or a pump has to be replaced.

The valves or gates in front of and behind these components have not been moved for a long time and are therefore so tight that the force of the hand is not sufficient to move the valve or gate, let alone shut off the pipe tightly.

In order to achieve this, pliers, levers and obscure constructions are used. In most cases, this approach leads to the breakage of the cast iron handwheel, to bending or even to the tearing off of the spindle, since the rotational force is applied laterally.

The company BRINKO has addressed this nuisance and developed the handwheel socket BRIwheelNut.

The special tool, which is protected with a design pattern, consists of a basic body with protruding webs that engage in the openings of almost all handwheels and that can be driven with a ½" ratchet. Due to the force applied centrally from above and the distribution of the pressure points over several surfaces, a non-destructive actuation of valves and slides is made possible.

The time saved and the avoided hassle of removing a destroyed valve with complete shut-off of the water supply or running a heating system empty with subsequent venting of all radiators makes the BRIwheelNut an indispensable and cost-saving helper.

Art. no. 129-50 1/2" Ratchet









Socket wrench set BRImultiLock 86 pieces

1/2" 1/4"

Art. no. 127-1

86 pieces

Troubleshooter!

BRINKO BRImultiLock for damaged hexagon head screws and many other profiles

- Reversible ratchet with inner and outer hexagon
- twelve-tooth profile, 1/2" and 1/4" drive

Material: Cr-V 50BV30 steel | Industrial quality | Standards: DIN 3124: ISO 2725 | Finishing: Silver mat finished | Profile: BRImultiLock - Best solution for varity bolts | Torsion: 30-50% (depends on size) higher than DIN | Life-Time: 200k circle times at 35% of DIN | square drive













Content:

- Plumber Ratchets 1/4", 1/2"
- Universal joint 1/4", 1/2"
- · Spinner Handle incl. adapter 1/4", 150 mm
- Sliding T Bar 1/4", 150 mm
- Extension Bar 1/4", 50 100 mm
- Extension Bar 1/2", 125 250 mm
- Plug Sockets 1/2", 16 21 mm
- Bit Adapter 1/2" 5/16"
- BRImultiLock Socket 1/2" SW 10 12 13 15 16 -17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm
- Deep Socket 1/2" SW 14 15 17 19 mm
- BRImultiLock Socket 1/4" SW 4 4.5 5 5.5 6 -7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 mm
- Deep Socket 1/4" SW 6 7 8 9 10 11 12 -
- Bits, slot 1/4" 4 5.5 6.5 mm
- Bits, cross slot 1/4" PH 1, 2 | PZ 1, 2
- Bits, allen key 1/4" 3 4 5 6 mm
- Bits, Tx 1/4" Tx 8 10 15 20 25 30
- Bits, cross slot 1/4" PH 1, 2 | PZ 1, 2
- Bits, allen key 1/4" 3 4 5 6 mm
- Bits, Tx 1/4" Tx 8 10 15 20 25 30
- Bit Adapter 1/4 5/16"
- Bits, slot 5/16" 8 10 12 mm
- Bits, cross slot 5/16" PH 3, 4 | PZ 3, 4
- Bits, allen key 5/16" 8 10 12 14 mm
- Bits, Tx 5/16" Tx 40 45 50 55





1111111













Socket wrench set BRImultiLock 57 pieces

Troubleshooter!

BRINKO BRImultiLock for damaged hexagon head screws and many other profiles

- · Reversible ratchet with inner and outer hexagon
- twelve-tooth profile, 1/4" drive

Material: Cr-V 50BV30 steel | Industrial quality | Standards: DIN 3124; ISO 2725 | Finishing: Silver mat finished | Profile: BRImultiLock - Best solution for varity bolts | Torsion: 30-50% (depends on size) higher than DIN | Life-Time: 200k circle times at 35% of DIN | square drive

Content:

- Plumber Ratchets 1/4"
- · Universal joint 1/4"
- · Sliding T Bar 1/4"
- Spinner Handle incl. adapter 1/4", 150 mm
- Hex keys 1,5 2,0 2,5
- Extension Bar 1/4", 50 100 mm
- BRImultiLock Socket 1/4" SW 4 4.5 5 5.5 6 7 8 9 -10 - 11 - 12 - 13 - 14 mm
- Deep Socket 1/4" SW 6 7 8 9 10 11 12 -13 mm
- Socket Tx-E 1/4" E 4 5 6 7 8
- Bits, cross slot 1/4" PH 1, 2, 3 | PZ 1, 2, 3
- Bits, slot 1/4" 4 5.5 7 mm
- Bits, allen key 1/4" 3 4 5 6 7 mm
- Bits, Tx 1/4" Tx 8 10 15 20 25 27 30 40

Art. no. 122

57 pieces

1/4"



144448888



















Screwdriver set



- · 6 pieces:
 - 4 slot-head screwdrivers 80 x 3, 100 x 4, 125 x 5.5, 150 x 6.5 mm 2 Pozidriv screwdrivers PZ 1, PZ 2
- · chrome vanadium steel
- · matt chrome-plated blades
- · 2-component handle with a hole







ROLL REPRESSIVE

Art. no. 2122 Slot-head / Pozidriv





Screwdriver set 1000 V



- 7 pieces, 1000 V:
 - 4 slot-head screwdrivers 1000 V 75 x 2.5, 100 x 4, 125 x 5.5, 150 x 6.5 mm 2 cross-head screwdrivers 1000 V PZ 1, PZ 2
 - 1 safety voltage tester 150 250 Volt (GS-certified)
- · chrome vanadium steel
- matt chrome-plated blades with protective insulation
- · 2-component hand with a hole
- · individually tested to IEC 60900

★ 1000 V IEC 60900







ROLL REPRESSIVE

Art. no. 2126/7

Slot-head / Pozidriv











Screwdriver set with striking cap



- Art. no. 2128 Slot-head / Phillips
- 2C power screwdriver with full-length blade and impact cap
- · Hexagonal shank for spanner socket
- · 6-piece set:
 - 4 flat-blade screwdrivers made from CV steel $75\,x\,3.5$ mm AF $8\mid 90\,x\,4.5$ mm AF $8\mid 100\,x\,5.5$ mm AF $8\mid 125\,x\,6.5$ mm AF $100\,x\,5.5$ m
- 2 screwdrivers Phillips head made of MoV steel PH1 SW 8 - PH2 SW 10
- · also for light chiselling work





ROLL REPRESSIVE



Hexagon spanner set Hex



- 9 pieces: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm
- · Chrome vanadium steel, bright nickel-plated
- · long design
- · hex/ball-end combined
- the ball-end allows you to screw up to a 30° angle
- · unfolding plastic holder allows free access
- · with belt clip



9 pieces, size: 1,5 - 10 mm



Claw-typee gripper magnetic

Everything is under control!

- · flexible claw-type gripper, length 60 cm
- · ideal for gripping screws, nuts etc. that are difficult to reach
- the claw, with, spring-action-system', can be opened up to
- . the additional magnet lifts metal parts up to 400 g
- · the integrated LED allows to find dropped small-parts even in dark corners



Length: 600 mm











Bit set | 32 pieces | colour-coded

- · Supplied in a plastic box with a belt clip
- · S2 steel, chrome-plated with colour-coding
- · 32 pieces:
 - 1 bit holder with quick release
- 1 adaptor for 1/4" 30 bits

Content	Colour	Sizes	Pieces
cross slot Philip	s 🔷 🔵	PH Gr. 1, 2, 2, 3	4
cross slot Philip	s 🛟 🔵	PZ Gr. 1, 2, 2, 3	4
slot	+ •	3, 4, 5, 6 mm	4
allen key	0	3, 4, 5, 6 mm	4
Tx	O	Tx 10, 15, 20, 25, 27, 30, 40	7
Security Tx	€ ●	STx 10, 15, 20, 25, 27, 30, 40	7













32 pieces











Assembly Connection Gauge

- · Supplied in an impact-resistant plastic case
- dimensional and spatial alignment of all common installation inside dimensions 1/2" in bare brickwork
- · easily readable circular bubble and with depth adjustment
- fixed adjustment increments: 75, 100, 120, 153, 200, 240 mm
- · also fits for assembly rails 150 mm
- for bathtubs and shower mixers, corner and flush-mounted valves, pipe ventilators

Art. no. 2845

1/2" thread





Valve extension cutter with chip collection

- for trimming 1/2" valve extensions made of red brass
- · with SDS chuck adaptor
- rubber cap collects the milled chips

Art. no. 705/1/2

1/2" thread













PREMIUM bathroom installation set | 17 pieces

1/2" Art. no. 677-2 17 pieces

NEW

17-piece, contents:

- · Combination corner valve spanner
- Double hole punch 32mm + 35mm
- · Duo valve holder
- Tap extension cutter with chip catcher
- Combination tap spanner 13 mm with 4 inserts 9, 10, 11, 12 mm and 1 claw
- · WC seat & sanitary installation spanner BRImultiKey 19 in 1
- · S-connection installation tool
- · Stick screwdriver Ø 10 mm
- Reversible ratchet, 1/2' drive, with internal and external square drive
- Deep hole marker, 2 in 1, black, with sharpener
- · Plumbing installation spanner
- Step spanner for radiators and water, 6 steps



Combination washbasin tap wrench

- Suitable for all fittings up to 13 mm threaded rod and SW 32 mm
- · 4 inserts 9, 10, 11, 12 and shank 13 mm
- · reversible claw with spring
- · Knurled handle
- Size 8 and 14 mm on request Art. No. 655-1/8 and 655-1/14

Art. no. 655

6 pieces



Valve holder

- · to lock eccentric and standard valves in place
- with a flexible T-handle
- · length 120 mm





Art. no. 725

1/2"

Length 120 mm





Duo valve holder

chrome plating.

Art. no. 726 Length 134 mm

Chrome-plated drain fittings installed in sinks tend to get scratched during installation, leading to customer frustration. To prevent this, there's the Automatic Duo Valve Holder. The Duo valve holder is inserted from the top into the drain valve and locks into place. Now, holding it during installation is no longer a problem, and there's no risk of slipping that could damage the

- For drain fittings in sizes 1" and 1 1/4"
- For use with a 1/2" drive."













Toilet seat & sanitary installation wrench BRImultiKey 19 in 1

The BRINKO Toilet seat & sanitary installation wrench 'BRImultiKey' 19 in 1 is a multi-talent for the different screw connections on toilet seats, and adapters on water taps and fittings (Perlators/aerators).

You practically do not need any other tools because this universal wrench combines almost everything in one tool.

- · Up to 19 adapter options
- Application with larger torques on very tight or rusted nuts, wing nuts, perlators or aerators
- Attractive form, comfortable and pleasant handles
- Reversible inserts (red) as a 'click system' for various sanitary attachments
- · Adapter options for 17 mm open-end wrench
- Inner adapter for wrench handle for a 1/2 inch ratchet wrench extension
- Universal wrench made of very durable and tough plastic PA6 (polyamide) and 30 % glass-fibres


WITHOUT an adapter:

Up to 11 different wing nuts of the toilet seat can be opened or screwed on.

WITH adapter:

Open and/or screw on 10 mm nuts (M6 threaded rods) or 13 mm nuts (M8 threaded rods).

Art. no. 662 17 mm | ½ Inch

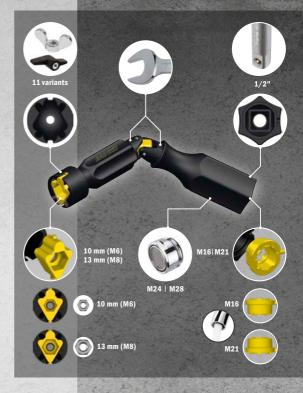



Carbon steel, stainless steel pipe cutter

Special pipe cutter for INOX, C-steel and Cu pipes For pipes with Ø 3 35 mm or 1", up to 3 mm wall thickness

- · magnesium die casting
- especially light 1/3 lighter than aluminum | almost 1/2 lighter than zinc diecast | 200 g lighter than 633-70/35 yet as strong as zinc die-cast
- · best strength/weight ratio of any metal
- · easily 100 % recyclable
- · modern material, increasingly also used in automotive engineering
- · powdercoated (not smoothly painted), thus better feel/grip for dirty (oily, greasy)/sweaty hands

Guide rollers

- needle bearing | 2 needle bearings per roller stainless steel
- · no more recess for cutting close to the flange, thus optimal guiding of the Inox tube

Fast running spindle

- · extra strong
- · zinc die casting
- · high dimensional accuracy
- · high surface quality (low roughness)
- · easy to machine: high accuracy

Integrated rotary deburrer

- · Noga deburrer (one of the best blade manufacturers in the
- · removable, easier deburring without moving the whole RAS

Spare cutting wheel

- Art. No. 633-75A
- size: 19 x 5 mm
- Additional spare wheel in the handle!
- · change without additional tool

Handle

· zinc die casting

Cutting wheel

- · needle bearing
- · less resistance when turning
- · clean cut









Pipe Ø 3 - 35 mm











Cutting wheel | Stainless steel, carbon steel, copper

- · replacement cutting wheel with needle bearing
- · suitable for stainless steel, carbon steel, copper
- suitable for: Art. no. 633-71/35
- Outer Ø 19 mm
- Inner Ø 5 mm
- · Thickness 5 mm

Art. no. 633-75A

Pipe Ø 8 - 28 mm





Ratchet cut | stainless steel, carbon steel

Problem-solver for pipes that are already installed

- specially for cutting stainless steel, carbon steel and copper pipe, Ø 8 – 28 mm
- · the fine ratchet functions makes it easy to cut the pipes
- · easy to adjust the spindle
- replacement cutting wheel Art. no. 622-1

Art. no. 622/28

Pipe Ø 8 - 28 mm





BRINKO 622/28

Cutting wheel | Stainless steel, carbon steel, copper


- replacement cutting wheel suitable for stainless steel and carbon steel
- suitable for: Art. no. 622/28
- · Outer Ø 19 mm
- · Inner Ø 6 mm
- · Thickness 3 mm

Art. no. 622-1

Pipe Ø 8 – 28 mm







With extra strong fast running spindle

- · 4-roller guide with groove for beading
- · integrated rotation deburrer
- 1 cutting wheel for stainless steel, copper and brass pipes, Art. no. 632-1
- 1 cutting wheel for plastic and composite pipes, Art. no. 633-1 (only integrated in the handle of Art. no. 633/35)

Art. no. 633/35

Pipe Ø 3 - 32 mm

Art. no. 633/45

Pipe Ø 9 - 45 mm



Art. no. 627

Pipe Ø 6 - 76 mm





Combination pipe cutter with deburrer

For pipes Ø 6 - 76 mm, 1/4 - 3"

for copper and brass pipes, plastic - two cutting wheels

- · rapid spindle adjustment
- 1 cutting wheel for plastic and composite pipe, Art. no. 627-1
- 1 cutting wheel for stainless steel, copper, brass and hard plastic pipe (up to 2 mm),

Art. no. 627-2









INOX pipe cutter Plus with deburring unit

Special pipe cutter for INOX pipes Ø 6 - 76 mm, 1/4 - 3"

· fast feeder system

Integrated rotation deburring unit

- Noga deburring unit (one of the world's best manufacturers of blades)
- detachable, easy deburring without having to move the entire RAS

Guide rolls

- · 4 guide rolls made of INOX steel for optimum hold of the pipe
- guide rolls with needle bearings | 2 needle bearings per roll stainless steel rolls
- no more prior puncturing for cuts close to the seam, this allows optimum guidance of the Inox pipe

Cutting wheel

- · fast exchange of cutting wheels without tools
- cutting wheel with needle bearings for INOX, Art. No. 627-71
- size: 19 x 6,2 mm
- · extra spare wheel in the handle !!!



Art. no. 627-70

Pipe Ø 6 - 76 mm



Cutting wheel | Stainless steel

- · replacement cutting wheel suitable for stainless steel
- suitable for: Art. no. 627-70
- · Outer Ø 19 mm
- · Inner Ø 5 mm
- Thickness 5 mm

Art. no. 627-71

Pipe Ø 6 - 76 mm





Plastic pipe scissors

For one-hand operation with automatic blade retraction

- for Ø 6 35 mm
- · for separating hard and soft plastic pipes, cable ducts, fibre-reinforced plastic and rubber hoses, pipes made of composite material and polypropylene
- · little strength required due to ratchet technology
- · straight and distortion-free, right angles cuts
- · no problem blade change

Art. no. 634/35

Ø 6 - 35 mm





Pipe deburrer

- · for internal and external deburring of stainless steel, brass, aluminium and plastic pipes
- · robust quality tool: stiff aluminium housing and very fine deburrer blade



Art. no. 648/54

















Automatic plastic tube shears

- · with lever transmission
- for tubes in PVC, PE, PD, PEX, PVDF with a wall thickness of up to 2 mm and composite tubes
- · single-hand operation and recoil-free ratchet mechanism, high safety standard
- · durable blade made of tempered steel with a precise angle for easy cutting of plastic tubes, with V-cut
- · little power required thanks to special teeth design
- · precise pinpoint cut without deformation of the tubes, wide
- · rubber-coated handle and powder-coating for a secure hold without slipping
- · transport lock and latch
- · blade with fast retraction
- · easy blade exchange

Art. no. 635/35

Pipe Ø 35 mm

Art. no. 635/42

Pipe Ø 42 mm















HD-Hand Inspection Camara BRIcamS

- . 5 inch LCD HD high resolution screen for real time display
- · High-quality CMOS sensor (camera) with a resolution of 1280 x 720 pixels (camera head Ø 8 mm)
- HD resolution screen with 1920 x 1080 and 1280 x 720 options
- · Photo and video recording to Micro SD-card
- Triple LED brightness adjustment of camera light and screen illumination
- · 1 meter swan-neck camera with IP67 waterproofing
- 4000 mAh, 3.7 volt lithium-ion battery provides up to 5 hours of standby time
- · Supports seven languages: English, French, German, Spanish, Italian, Japanese, Chinese

Art. no. 3780 5-Inch-LCD-HD





Content:

- · Screen Unit
- 1 Meter Swan-Neck Camera with Ø 8 mm Camera Head
- · User Guide
- · Threading-Attachable Hook
- · Threading-Attachable Magnet
- Threading-Attachable 90° Mirror
- · Charging cable USB-C to USB-A USB-A charger



















Pipe inspection camera system BRIcamL

Video inspection system for visual inspection of pipes, hollow bodies and spaces as well as finding blockages or damage!

Pipe inspection camera system BRIcamL with a swivelling camera head, only 28 mm diameter and 40 m fiberglass cable, intelligent compact design combined with simple operation and easy transportation, thanks to the aluminium frame.

This waterproof system is complete with transmitter module can be used between and can be detected, tracked and located by locating devices, operating at 512 Hz. The camera head of the BRIcamL can be rotated 360° and swiveled by 210° and enables an exact Driving through connections and checking pipe branches. The display unit is surrounded by a robust, waterproof and airtight

plastic case and can be used in cramped working conditions or for better transport of the sperated push cable unit. On the 10" TFT monitor with a Resolution of 800 x 600 pixels the smallest Defects will be recocnized and the number of meters inserted are shown. The BRIcamL is equipped with a multifunctional Control panel with QWERTY keyboard for entering text, as also an integrated microphone for voice recording during video recording on SD card or USB stick. This intelligent system even has a device for cleaning the fibre cable after use by pushing it back, which removes adhering water and impurities. These are collected in the waterproof body, which can then be emptied outdoors.

By unscrewing the transmitter unit and inserting an optional adapter, bends from DN50 upwards are possible. This system can also be operated with a 10 or 20 meter long hand reel with a Ø 12 mm camera head.

Content:

- · 360°/210° rotating/swivelling camera head Ø 28 mm
- · Camera cable: Ø 7mm/40 metres long
- · Steel coil, Meter counter
- · 6-pin camera connection
- · Cleaning brush
- 512 Hz sender
- IP68 Multifunctional control device in the IP66 case, 10" TFT monitor with USB/SD recording
- . Text and voice input using the OWERTZ keyboard
- Control buttons for swivelling camera head
- · Operated with 6600 mAh Li-Ion battery or current
- · Mains adapter, Guide ball and star for camera head
- · Video cable 1 metres 6-pin, Remote operation

Art. no. 3741 DN70 - DN160























Brazing set - HLS

Portable brazing device for propane/oxygen for hard and soft soldering

A small and thus easily transportable brazing device is also listed in the certification list. Equipped with a 2-litre oxygen and 425 g propane cylinder, check valves for propane and oxygen (required by accident prevention regulations), pressure regulator, 3 m double hose, and adjustable handle with burner. This brazing device offers everything needed for brazing and annealing copper pipes (if already available, use the refrigeration-climate sets without brazing equipment). Performance up to 2850 °C

Set of 9, comprising:

- · Propane cylinder
- · Oxygen cylinder
- · Propane-oxygen hose
- · Support frame
- Handle
- Insert, size 2 4
- · Oxygen pressure regulator valve
- · Liquefied gas medium pressure regulator
- · Check valve

Art. no. 3851

9 pieces











Hydraulic pipe bending set | Combined

Supplied in a strong plastic case:

1 hydraulic hand pipe bending tool 9 bending segments, aluminium pressure die-casting, 10, 12, 15, 16, 18, 20, 22, 26, 32 mm 5 dollys

- for soft copper pipes, sheathed copper and soft steel pipes \emptyset 10 22 mm
- for stainless steel pipes Ø 10 15 mm
- for composite pipes Ø 12 32 mm
- bends up to 90°
- bending radius 4 x diameter
- to refill the oil, please use "Shell Morlina S2 BL 10" (formerly "Shell Tellus C 10")

Art. no. 637-10

15 pieces



Hydraulic pipe bending set imperial* - HRB-Z

The hydraulic pipe bending set imperial enables easy and smooth bending of soft, semi-hard, and coated copper and mild steel pipes with imperial outer dimensions. This avoids soldering-press connections and potential leaks. A standard bending radius is maintained with this hydraulic tube bending set.

- For soft, semi-hard, and coated copper and mild steel pipes \emptyset 1/4" 7/8"
- For stainless steel pipes Ø 1/4" 1/2"
- For composite pipes Ø 1/4" 7/8"
- Bends up to 90°; bending radius 4x diameter

Set of 11, comprising:

- · Hydraulic manual pipe bending device
- Bending segments, aluminium die-casting, 1/4" 5/16" 3/8" 1/2" 5/8" 3/4" 7/8", 3 counter-holder

Art. no. 637-30

11 pieces













Hydraulic pipe bending set metric* - HRB-M

The hydraulic pipe bending set metric enables easy and smooth bending of soft, semi-hard, and coated copper and mild steel pipes with metric outer dimensions. This avoids soldering-press connections and potential leaks. A standard bending radius is maintained with this hydraulic tube bending set.

- For soft, semi-hard, and coated copper and mild steel pipes \emptyset 10 - 22 mm
- For stainless steel pipes Ø 10 15 mm
- For composite pipes Ø 12 22 mm
- Bends up to 90°; bending radius 4x diameter

Set of 9, comprising

- · Hydraulic manual pipe bending device
- Bending segments, aluminium die-casting, 10, 12, 15, 18, 22 mm, 3 counter-holder

Art. no. 637-40

9 pieces



























Sealing balloon

- · easily seal pipes
- pneumatic sealing system for various pipe diameters
- · insert, inflate, work
- suitable for compressed air hose Art. No. 3800-2 and to the air pump with manometer Art. No. 3800-3

Art. no. 3800-1/1

Pipe Ø 30 – 50 mm

Art. no. 3800-1/2 Pipe Ø 50 – 80 mm






Art. no. 3800-1/3 Pipe Ø 70 – 100 mm

Art. no. 3800-1/4 Pipe Ø 90 – 150 mm















Compressed air hose

- extension hose for sealing bubbles
- · can be extended as required
- · length 3 m

Art. no. 3800-2

Length 3 m



Plug for inner pipe

Mechanical pipe sealing system for inner pipe

- · ideal for sealing drain pipes and for long-term applications
- · easy to insert and secure due to extra large wing nut
- · resistant to use and waste water
- suitable for all types of pipest
- maximum counterpressure: 1.2 bar or 12 m
- · Housing made of glass-fibre reinforced ABS plastic
- · sealing ring based on natural rubber
- Galvanised threaded screw and wing nut corrosion-resistant

Original Gripper - tested and proven, the most preferred mechanical shut-off discs on the market

Maximum Counter Pressure 1.2 bar corresponds to a 12 m water column

Art. no. 3806/1

Pipe Ø 96 - 103 mm

Art. no. 3806/2

Pipe Ø 147 – 154 mm





Art. no. 3806/3

Pipe Ø 196 - 204 mm





Plug for end pipe

Mechanical pipe sealing system for end pipe

- · ideal for sealing drain pipes and for long-term applications
- · easy to insert and secure due to extra large wing nut
- · resistant to use and waste water
- suitable for all types of pipest
- · maximum counterpressure: 1.2 bar or 12 m
- · Housing made of glass-fibre reinforced ABS plastic
- · sealing ring based on natural rubber
- · Galvanised threaded screw and wing nut corrosion-resistant

Original Gripper - tested and proven, the most preferred mechanical shut-off discs on the market

Maximum Counter Pressure 1,2 bar corresponds to a 12 m water column

Art. no. 3805/1

Pipe Ø 39 - 42 mm

Art. no. 3805/2

Pipe Ø 49 - 55 mm





Art. no. 3805/3

Pipe Ø 71 - 79 mm

Art. no. 3805/4

Pipe Ø 96 - 103 mm





Art. no. 3805/5

Pipe Ø 147 - 154 mm













Glass tile drill

Single Drill

- · optimally designed for cordless power tools
- 1/4" hexagonal shaft
- · pointed chisel edge enables precision drilling, can be re-shar-pened
- · shaft diameter 6.35 mm

Please note: Only use in rotation (low rotation speed) and in sufficiently cool.

Areas: ceramics, tiles, hard-fired tiles, glass, acrylic glass, mirror glass



Ø 5 x 75 mm

Art. no. 1368-1/6

Ø 6 x 75 mm





Art. no. 1368-1/8

Ø 8 x 85 mm

Art. no. 1368-1/10

Ø 10 x 90 mm





Art. no. 1368-1/13

Ø 13 x 100 mm

Art. no. 1368-1/14 Ø 14 x 100 mm





Glass tile drill set

- 5 piece
- Sizes: 2 x 6, 2 x 8.1 x 10 mm
- · optimally designed for cordless power tools
- · 1/4" hexagonal shaft
- · pointed chisel edge enables precision drilling, can be re-shar-pened
- · shaft diameter 6.35 mm

Please note: Only use in rotation (low rotation speed) and in sufficiently cool.

Areas: ceramics, tiles, hard-fired tiles, glass, acrylic glass, mirror glass



5 pieces



DIAMOND core drills BRIdiamondDrill

Drilling without a centring aid

- connector M14 to be used with the angle grinder and BRIspeedDrill
- · hi-grade diamond grains for fast working, provide clean results
- · perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended: 8.000 - 14.000 rpm)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled

Art. no. 1381-1/6

Ø 6 mm

Art. no. 1381-1/8

Ø 8 mm



Ø 10 mm

Art. no. 1381-1/12

Ø 12 mm



Ø 14 mm





DIAMOND core drills set BRIdiamondDrill

Drilling without a centring aid 7-pieces: Ø 2 x 6, 2 x 8, 10, 12, 14 mm

- · connector M14 to be used with the angle grinder and BRIspeedDrill
- · hi-grade diamond grains for fast working, provide clean results
- · perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended: 8,000 - 14,000 rpm)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled























DIAMOND tile drilling set BRIspeedDrill

Achieve clean and precise hole drilling in tiles and porcelain stoneware tiles - with BRIspeedDrill, the most economical and fastest method!

Bathrooms are no longer just functional spaces; they have evolved into wellness oases. Tiles are still the preferred choice for wall and floor coverings. However, things change here too: tiles and porcelain stoneware tiles are getting larger, thicker, and above all, harder.

When drilling with diamond drills, it is important to note that the hole is ground into the material rather than drilled. Diamond drilling is a grinding technique. Therefore, a 6 mm diamond drill requires a speed of 8,000 RPM. Grinding techniques require speed. Diamond drilling with, for example, a cordless screwdriver (approximately 1,300 RPM) is therefore only a makeshift solution and carries the risk of the drill slipping when starting (diamond drills do not have a centring point).

The new BRIspeedDrill set from BRINKO offers the advantage of a small, handy machine that is easy to use. In contrast to the BRIspeedDrill, working with an angle grinder in confined workspaces is very difficult. By precisely positioning with our BRIspeedDrill, the mounting holes are also covered by the usually very small cover rosettes.

Another advantage is the suitable speed of approximately 8,000 RPM compared to the angle grinder, which operates at 11,000 to 17,000 RPM and thus increases wear on the diamond drills.

Content:

- · Cordless high-speed drill with 8,000 RPM
- · DIAMOND tile drill BRIdiamondDrill
- Sizes 2x Ø 6 mm, 2x Ø 8 mm, Ø 10 mm, Ø 14 mm
- · Battery type 12 V, 2 Ah and 12 V, 4 Ah
- · Charger
- · Adapter M14a
- · Various polishing pads













7pieces











DIAMOND core drills set BRIdiamondDrill

Drilling without a centring aid 7 pieces: Ø 3 x 6, 3 x 8, 10 mm

- · connector M14 to be used with the angle grinder and BRIspeedDrill
- · hi-grade diamond grains for fast working, provide clean results
- · perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- extremely long service life thanks to high speeds (recommended: 8,000 - 14,000 rpm)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled



Art. no. 1381-6

7 pieces











DIAMOND core drills set BRIdiamondDrill

Drilling without a centring aid 7 pieces: Ø 2 x 6, 8, 10, 12, 14 mm 1 Centering Guide stainless 5 - 40 mm

- · connector M14 to be used with the angle grinder and
- · hi-grade diamond grains for fast working, provide clean results
- · perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended: 8,000 - 14,000 rpm)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled























DIAMOND core drills set BRIdiamondDrill

Drilling without a centring aid 4 pieces: Ø 2 x 6, 8, 10 mm

- · connector M14 to be used with the angle grinder and BRIspeedDrill
- · hi-grade diamond grains for fast working, provide clean results
- perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended: 8,000 - 14,000 rpm)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled

Art. no. 1381-4

4 pieces

















DIAMOND core drills BRIdiamondDrill

Advantages of the DIAMOND drills:

- · precise positioning, minimum risk of slipping off
- · Safety, Fast, Efficiency & Sophisticated design
- · special wax filling ensure cooling, no cooling water required
- hex shank Ø 8,2 mm
- · wax filled core helps cooling and lubricates, need not watering
- · a strong bond is made through the brazing process extending
- · Diamond coated design reduces cutting heat for 5x longer working life

Reliable cutting, drilling & grinding in the following materials:

- · floor and wall tiles, hard porcelain
- · granite and marble
- · glass and fiberglass

Art. no. 1379-3/5

Pipe Ø 5 mm

Art. no. 1379-3/6

Pipe Ø 6 mm





Art. no. 1379-3/8

Pipe Ø 8 mm

Art. no. 1379-3/10

Pipe Ø 10 mm





Art. no. 1379-3/12

Pipe Ø 12 mm





BRINKO*8mm



















DIAMOND core drills set BRIdiamondDrill

Drilling without a centring aid 4 pieces: Ø 2 x 6, 8, 10 mm

- · hi-grade diamond grains for fast working, provide clean results
- · perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled



4 pieces

















DIAMOND core drills set BRIdiamondDrill

Drilling without a centring aid 7 pieces: Ø 2 x 6, 8, 10, 12, 14 mm

- 1 Centering Guide stainless 5 40 mm
- . hex shank Ø 8 mm
- · hi-grade diamond grains for fast working, provide clean results
- · perfectly suited for drilling clean holes in granite and stone slabs, porcelain, ceramics and tiles
- · extremely long service life thanks to high speeds (recommended)
- · special wax filling ensures cooling, no extra cooling required single hole drilling - only required if multiple holes are drilled



















HSS-bi-metal hole saw set | Plumbing standard

Art. no. 1384

6 pieces

For sanitary work

• supplied in unbreakable plastic case, 6 pieces: 5 HSS-bi-metal hole saws Ø 44, 57, 68, 75, 114 mm, 4 - 6 tpi 1 SDS chuck adaptor with HSS drill

- cutting depth 40 mm
- · for steel, Nirosta, non-ferrous metals, HAT pipe, wood and aerated concrete
- · also ideal for switches and sockets
- · all hole saws are also available individually Art. no. 1380









Double-hole punch

To securely fasten mixer taps and spigot taps in kitchen sinks and other sheet materials, precise and accurately sized mounting holes are required.

With the double-hole punch, mounting holes in the most commonly requested sizes Ø 32 mm and Ø 35 mm can be created cleanly and without contamination.

The double-hole punch is suitable for the following thicknesses:

- · Iron, steel, copper, and aluminium sheets up to 2 mm
- Stainless steel sinks and other stainless steel sheets up to 1.5 mm

Art. no. 914

Ø 32 + 35 mm













Ø 35 mm Hole diameter

Deep-hole marker 2-in-1 with a sharpener

One pen - two functions

With a cap: Retractable pencil for precise marking and writing Without a cap: Deep-hole marker for drilling and installation tasks

- · very stable, with a practical clip
- sharpener integrated into the push-button
- graphite universal refill for marking on rough and smooth surfaces
- · ergonomic, triangular form
- · preserves resources and is environmentally-friendly
- · designed for various refills for almost all surfaces and materials



black | yellow



2in1



DRY Profi

Effective pressing mechanism for automatic lead propulsion in robust stainless steel tube

- · easy one-handed operation thanks to improved clip
- integrated sharpener with guide for fast sharpening at any time
- leads can be replenished from the front or back
- for all surfaces (wood, metal, glass, ceramics ...)
- special graphite lead included can be wiped off smooth surfaces with a damp cloth
- separately available coloured leads, water soluble or waterproof
- available in colour sets or individual colours for versatile use on light and dark backgrounds













Universal knife Das Original BRINKO cutter knife ergonomic 2-component handle with soft plastic super-sharp, double-ground blade width 18 mm, thickness 0.5 mm blade feed with automatic lock 2 replacement blade strips in the handle colour: yellow, black Art. no. 2980 160 x 45 x 25 mm





Art. no. 2982 **Blade dispenser Black Blades** 100 x 18 x 0,5 mm **Original BRINKO Black Blades** Cutter blades, 10-part, suitable for Art. no. 2980 · super sharp blade for precise cuts · reinforced design · fits all conventional cutter knives · dual edge for maximum sharpness · maximum lifespan thanks to flame hardening process · ideal for various materials · blade is coated black Original BRINKO Black Blades · delivered in a dispenser · 8 segments • 100 x 18 x 0,5 mm **10** x CONTROL BIRDS BRINKO

Fitter's hammer with 3-component handle Vibration-free fitter's hammer with 3-component handle. The hammer head with the forged safety collar according to DIN 1041 and rubber protection sheath is secured mechanically in the handle with a heavy steel wedge. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the

Art. no. 1475/300

Weight 300 g

Weight 500 g

Art. no. 1475/500

Art. no. 1475/1000 Weight 1000 g

non-slip rubber handle are moulded around this.

Benefits:

- · Shock-absorbing, therefore gentle on the joints
- · High-safety handle is indestructible
- . The handle is permanently connected to the hammer
- · Non-slip handle allows ergonomic and safe work
- · Highest possible level of safety



Weight 1000 g

Club hammer with 3-component handle

Vibration-free club hammer with 3-component high-safety handle.

The hammer head with the forged safety collar according to DIN 6475 and rubber protection sheath is secured mechanically in the handle with a heavy steel wedge. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this.

Benefits:

- · Shock-absorbing, therefore gentle on the
- · High-safety handle is indestructible
- . The handle is permanently connected to the hammer head
- · Non-slip handle allows ergonomic and safe
- · Highest possible level of safety











Soft-faced hammer with 3-component handle

Soft-faced hammer with 3-component high-safety handle and steel middle element.

Ideal for firm yet gentle hammering during installation work, alignment and attachment. White polyamide inserts are connected to the middle part by means of a dual-locking attachment system; this guarantees absolute safety at work. The inserts can be replaced and ordered separately. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this.

Note: Not recoil-free!

Benefits:

- · Shock-absorbing, therefore gentle on the joints
- · Dual-locking attachment system of the polyamide inserts
- · High-safety handle is indestructible
- The handle is permanently connected to the hammer head
- · Non-slip handle allows ergonomic and safe work
- · Highest possible level of safety

Art. no. 1480/32

Head Ø 32 mm

Art. no. 1480/40

Head Ø 40 mm







Tool case plumbing

Hard-top case, black

- dimensions 480 x 370 x 225 mm
- · alu frame
- · non-slip carrying handle
- · 2 locks
- · with shoulder strap
- · reinforced metal corners as additional protection against damage


Art. no. 7410

empty, 480 x 370 x 225 mm



ABS ***

Inside:



· document pocket

· bottom half of case equipped with variable partitions



















Young technician toolbox Plumbing/heating

Hard-top case, black, fitted with 22 special tools

- dimensions 480 x 370 x 225 mm
- black alu frame, non-slip carrying handle, 2 locks, with shoulder strap
- reinforced metal corners as additional protection against damage Inside:
- 2 tool kits completely removable, document pocket, bottom half of case
- · equipped with variable partitions

Content:

83 Ratchet wrenches 4 in 1, 10 x 13 und 17 x 19 mm

• 105/10 Plumbing installation wrench

• 128 Universal screw insert Ø 9 - 21 mm

• 129-9 Connecting square 1/2"

633/35 Pipe cutter with deburrer to Ø 32 mm
 655 Combination washbasin tap wrench

Toilet seat & sanitary installation wrench

BRImultiKey 19 in 1 Step wrench set 86 mm

675 Step wrench set 86 mm687/250 Water pump pliers 250 mm

• 689/240 Fittings pliers | Key pliers 240 mm

• 1470/300 Cross peen hammer 300 g

• 1728/146 Universal bow saw

• 2126/7 Screwdriver set, 7 pieces

4 slot-head screwdrivers 75 x 2.5, 100 x 4, 125 x 5.5, 150 x 6.5 mm

2 cross-head screwdrivers PZ 1, PZ 2 1 Safety voltage tester 150 - 250 Volt

2528 Deep-hole marker 2-in-1 with a sharpener
 2980 Universal knife for cutter blades 18 mm

• 180094 Electrician's chisel 200 x 12 mm

Art. no. 7421

23 pieces, 480 x 370 x 225 mm





ABS ***









Apprentice case BRIbasic

Hard case, black, fitted with 14 special tools

2 tool boards and document pocket completely removable, lockable, incl. 2 keys, bottom tray with variable dividers made of aluminum, reinforced metal corners as additional protection against damage, Tool case empty, Art. no. 220030

Content:

 Screwdriver set 6 pieces, Art. no. 2122 4 slot-head screwdrivers 80 x 3, 100 x 4, 125 x 5.5, 150 x 6.5 mm

2 cross-head screwdrivers PZ 1, PZ 2

- Water pump pliers 240 mm, Art. no. 680/240
- Cross peen hammer 300 g, Art. no. 1470/300
- Pipe cutter, Art. no. 633/35
- · Universal knife, Art. no. 2980
- Plumbing installation wrench, Art. Nr. 105/10
- · Universal bow saws, Art. no. 1728/146
- Hex key set, 7 pieces, 2.5, 3, 4, 5, 6, 8, 10 mm, Art. no. 111/2

Spirit level, Art. no. 2839



Art. no. 7416

14 pieces, 460 x 350 x 180 mm















Tool case Plumbing EXCLUSIVE

Hard-top case, black, fitted with 37 special tools

- dimensions 480 x 370 x 225 mm
- black alu frame, non-slip carrying handle, 2 locks, with shoulder
- · reinforced metal corners as additional protection against damage
- · 2 tool kits completely removable, document pocket, bottom half
- · equipped with variable partitions

Content:

• 22-1/300 Instrument key 300 mm

• 56 Open-end wrench 10 x 13 mm / 17 x 19 mm • 92 Socket wrench 10 x 11, 12 x 13, 17 x 19, 19 x 22

• 105/10 Plumbing installation wrench • 106-2 Plumbing four-way socket wrench

• 114 Hex key set, • 129-3/250 Reversible ratchet

• 129-7/125 Extension

• 129-12 BRImultiLock insert 10, 13, 17 mm • 619/1 Corner pipe pliers 320 mm, 49 mm, 1"

• 631-5 Miniature pipe cutter

• 633/35 Pipe cutter with deburrer up to Ø 35 mm / 13/8",

up to Ø 32 mm / 1 1/4"

• 655 Combination washbasin tap wrench

• 673/86 Step wrench 86 mm • 687/250

Water pump pliers 250 mm 1333/200-10 Electrician's chisel 10 mm

• 1470/500 Cross peen hammer 500 g

1654-1/250 Engineer's file | half round

• 1710 Burner brush

• 1726/146 Universal bow saws

• 2070/125 Slot-head screwdriver 5.5 x 125

• 2070/150 Slot-head screwdriver 6.5 x 150 • 2080/1 Screwdriver | PZ1 x 80 / 2 - 3 mm

• 2080/2 Screwdriver | PZ2 x 100 / 3 - 5.2 mm

• 2088/145 Voltage tester

• 2524/235 All-purpose pencil 235 mm

• 2705/2 Cutting Folding ruler 2 m

• 2980 Universal knife

• 2999-1/25 Solder water brush

25 mm. 1"

• 3820 Hemp dispenser

• 2836/400

Lightweight metal spirit

level 400 mm









37 pieces, 480 x 370 x 225 mm



ABS 恭





V-Press jaw set

Press jaws also wear out during use. Replacing them guarantees the safety of the pressing process and safeguards the worker by using suitable press jaws.

BRINKO offers the most commonly used sizes V15, V22, V28, and V35 in a specially equipped BRINKO box with the V-Press jaw set. The BRINKO box has 2 additional slots where intermediate sizes like V12 and V18 can be stored, as well as a compartment for additional equipment such as pipe cutters or deburrers.

Art. no. 625-10SE

5 pieces



Contents:



The empty area in the case can be used very well for customising with common aids for everyday needs.

Not included in the set!



625-10/15



625-10/22



625-10/28



625-10/35











M-Press jaw set

Press jaws also wear out during use. Replacing them guarantees the safety of the pressing process and safeguards the worker by using suitable press jaws.

BRINKO offers the most commonly used sizes M15, M22, M28, and M35 in a specially equipped BRINKO box with the M-Press jaw set. The BRINKO box has 2 additional slots where intermediate sizes like M12 and M18 can be stored, as well as a compartment for additional equipment such as pipe cutters or deburrers.

Contents:

M-Press jaws M15, M22, M28, and M35

These pressing jaws also fit all 32 KN machines from other manufacturers.

The empty area in the case can be used very well for customising with common aids for everyday

Not included in the set!



625-13/15



625-13/22



Art. no. 625-13SE

5 pieces

625-13/28



625-13/35

Cordless Pressing Tool ACO203 BT | 5.0 Ah

Comfort Line ACO203 - a new generation of pressing technology – NEW WITH BLUETOOTH

Supplied in case:

cordless pressing unit, 1 rechargeable battery 18 V 5.0 Ah Li-lon, 1 charger, storage space for up to 6 press jaws PB2

- · Data transfer via Bluetooth®
- for press connections 12 54 (108) mm metal, 16 110 mm plastic
- fits securely in your hand: 2.8 kg, 39 cm long (without press jaw), ergonomic shape
- Features: pressing area illumination, implemented force monitoring and diagnosis function, innovative brushless motor technology for faster pressing process and more pressings per battery charge
- output: 450 W, piston force: 32 kN, piston stroke: 40 mm
- rechargeable battery: 18 V Li-Ion 5.0 Ah, battery capacity: up to 250 pressing processes, charging time: 60 min
- compatible with novopress PB2 press jaws Art. no. 625-30 to -35 and novopress PS2 press collars Art. no. 625-40 to -45



Art. no. 625-5PM/AC0203

Pipe Ø 12 - 110 mm















Suction Cup

Guaranteed the right Suction Cup for your application with the highest degree of security

- plastic body, 2x suction disc Ø 120 mm
- load-bearing capacity: up to max. <> 80 kg,

 40 kg
- guideline value use under the specified value recommended
- · handle is covered with non-slip rubber

Can be used on all materials with smooth, sealed surfaces (e.g. panes of glass, tiles, stone, sheet steel, panels made of coated wood)

Safety information:

- the surface of the object and the suction discs must not be greasy
- · before lifting a weight, carry out a test
- never walk under the load and never lift above yourself or others

Art. no. 1180

0.39 kN





Tension cable | 8 mm, length 1 m

- Rubber tension cable 8 mm thick and 100 cm long
- latex core
- · with two rubberised universal wire hooks
- approved lashing capacity: 70 N ~ 7.1 kg

Art. no. 1140/8

Length 1 m



Breathable protective gloves

- · Nitrile coating, pimpled
- · extremely grippy due to high abrasion resistance
- · very comfortable to wear, hands remain cool and dry

Art. no. 3454/9

Size 9

Art. no. 3454/10

Size 10

Art. no. 3454/11

Size 11





Work gloves BRIGecko

- · Premium quality
- 100 % polyamide, finely knitted
- · latex-coated glove palm
- · repels liquid
- · excellent fit





Art. no. 3458/9

Size 9

Art. no. 3458/10

Size 10











BRImobileWork folding workbench

Back-friendly work with maximum work safety!
Easy to transport with one hand - effortless to move thanks
to wheels and pull rod, simple folding mechanism - quick to
assemble.

Safe stand!

The compact folding workbench "BRImobileWork" offers the perfect balance of weight, mobility, stability, size and functionality. Ideal for use on construction sites, as well as space-saving and mobile.

- · Weight under 20 kg
- Work surface 785 x 585 mm and a 30 mm thick screenprinted plate
- Working height 800 825 mm thanks to four adjustable feet to compensate for uneven surfaces
- · Load capacity up to 200 kg (surface load)
- Dimensions when folded 785 x 250 x 585 mm
- Two large plastic wheels and fold-out pull rod for easy transport when folded up
- Can be moved over the two wheels when assembled by tilting the workbench
- Table legs made of galvanized square tube are locked by a crossbar with a spring mechanism for a firm stand
- Screen-printed plate with anti-slip surface and framed in T-profile steel frame
- · Vice and other holding systems can be mounted



785 x 585 mm














HUPcompact HC06 for MC4 (Multi Contact)

Art. no. 213110

for MC4 (Multi Contact) 4 - 10 mm²

Tool frame made of hardened steel, crimp segments made of high quality carbon steel eroded, heat treated, polished and nickel plated



- · Simple single-handed operation
- With unlockable positive ratchet
- · 100% parallel feed
- · Precision crimp
- · Crimping force: 5 kN
- · Small and compact design
- · Service life: 50,000 crimps
- Roll-crimp (for MC4 (Multi Contact)) 4 / 6 / 10 mm²







LONG LIFE 50000



Crimping pliers HUPstar Photovoltaic



Art. no. 213084

1.5 - 6 mm²

for photovoltaic connectors. Crimping pliers for industrial users, rotatable precision press die with parallel feed, exchangeable dies. Press star 213084/E

Photovoltaics:

Amphenol Helios H4: 2.5 / 4 / 6 for MC3 (Multi Contact): 2.5 / 4 / 6 for MC4 (Multi Contact): 2.5 / 4 / 6 Tyco Solarlok: 1.5 / 2.5 / 4 / 6

For industrial users: Up to 80,000 crimps possible



Crimping pliers photovoltaic



Art. no. 211657

for MC3 (Multi Contact) 2.5 - 6 mm2

2.5 - 6 mm², with unlockable positive lock, crimp pressure adjustable

Art. no. 211657 Square crimp (for MC3 (Multi Contact)) 2.5 / 4 / 6 mm²

Art. no. 211659 Roll-crimp (for MC4 (Multi Contact)) 2.5 / 4 / 6 mm²







Art. Nr. 211659


for MC4 (Multi Contact) 2.5 - 6 mm2











Crimpset X-Crimp for photovoltaic



Crimping pliers for quick change of HAUPA precision crimping dies especially for photovoltaics. Delivery in robust nylon bag (Art. 220260)

- reliable crimping results as with permanently installed press inserts
- · positive lock ensures standard-compliant crimps
- · flat design for precise work even in confined spaces

Content:

Art. 211690





Art. no. 211697

Nylon bag included

Cable stripper HUPstripPV

Solar 2.5 - 6 mm2 | Ø 7.5 - 9.5 mm

• For stripping all common cables in the field of photovoltaics

mm²

- · No adjustment of the blades to the cutting depth necessary
- With length stop 8.5 and 15 mm for uniform stripping lengths of common photovoltaic contacts
- · Fastening clip for safe storage
- · Housing made of high-quality, wear-resistant polyamide

Art. no. 201060

 $2.5 - 6 \, \text{mm}^2$



Cable stripper HUPstripPV+

Solar 1.5 - 16.0 mm2 | 16 - 6 AWG

- easy handling thanks to the four-chamber system
 (1.5 mm² / 2.5 mm² / 4 mm² + 6 mm² / 10 mm² + 16 mm²)
- · For stripping solar and photovoltaic cables
- Precise alignment of the blades to standard solar cables
- · Length stop adjustable to the millimetre from 5 to 26 mm
- · Additional blade for making a longitudinal cut
- low weight, as the housing is made of high-quality, wear-resistant polyamide wear-resistant polyamide
- Effective use and extremely good power transmission due to ergonomic shape
- · Suitable for right and left-handers

Art. no. 201062

1.5 - 16 mm²







Assembly tool MC4 (Multi Contact)

For assembling and loosening the cable glands of MC4 connectors (Multi Contact), easy loosening of the locks on MC4 (Multi Contact) housings, made of glass-fiber reinforced plastic

Art. no. 110806

for MC4 (Multi Contact)



HUPsolarKit5

Equipped with 5 tools in a practical belt pouch.

Contents:

201085 Cable cutter HUPtriCut dip-insulated

160 mm for Ø 8 mm

201062 Cable stripper HUPstripPV+ | 1.5 - 16 mm² 110806 assembly tool for MC4 (Multi Contact, 2 pieces)

213110 HUPcompact HC06 for MC4 connector (Multi Contact) 4 - 10 mm²

220105 Belt bag ToolBelt with 8 compartments

Art. no. 330050

6 pcs., 200 x 100 x 300 mm











HUPsolarKit4

Equipped with 5 tools in a practical plastic case.

Contents:

211225 Cable cutters VDE HUPtriCut

160 mm for Ø 8 mm

201062 Cable stripper HUPstripPV+ | 1.5 - 16 mm²
110806 assembly tool for MC4 (Multi Contact, 2 pieces)
213110 HUPcompact HC06 for MC4 connector

213110 HUPcompact HC06 for MC4 (Multi Contact) 4 – 10 mm²

330048/K Case with insert

Art. no. 330048

6 pcs., 340 x 275 x 70 mm





HUPsolarKit3

Equipped with 5 tools in a practical plastic case.

Contents:

211225 Cable cutters VDE HUPtriCut

160 mm for Ø 8 mm

201060 Cable stripper HUPstripPV | 2.5 - 6 mm²
110806 assembly tool for MC4 (Multi Contact, 2 pieces)
211659 Crimping pliers photovoltaic | for MC4 (Multi

Crimping pliers photovoltaic | for MC4 (Multi Contact) 2.5 - 6 mm²

330046/K Case with insert

Art. no. 330046

6 pcs., 340 x 275 x 70 mm











Tool cases 2025



Classification for tool cases | Specifications

ABS **

- · Surrounding impact edge protection
- · High quality metal locks, lockable
- · Stable and hardened aluminium frame
- · Ergonomic handle
- · 3 metal hinges
- · Including carrying strap

220028 Tool case Start up S

460 x 180 x 310 mm



220031 Tool case Start up Prof

470 x 200 x 360 mm



ABS reason in the second secon

220023 Trolley Start up Profi 470 x 200 x 360 mm



ABS+ **

- · Extra wide surrounding impact edge protection
- · High quality metal locks, lockable
- · Extra stable and hardened aluminium frame
- 3 metal hinges
- Particularly stable lid holder

220076 Tool case Pendant 460 x 180 x 310 mm



220068 Tool case Omega 460 x 180 x 310 mm



220038 Tool case Aktion 460 x 160 x 310 mm



220042 Tool case Omega Max 470 x 200 x 360 mm



220048 Tool case Omega Trolley 470 x 220 x 360 mm



HDPEfly***

- · Flight-suitable and break-proof
- · Extreme durability thanks to HDPE shell with soft-touch look
- · Corners additionally reinforced with aluminium
- · Extra wide surrounding impact edge protection
- · Locking, extra-long trolley system
- · Ball-bearing mounted easy running castors
- · High quality metal die cast locks, lockable
- · Additional combination lock
- · Extremely stable and specially hardened aluminium frame
- · 3 riveted metal hinges
- · Particularly stable lid holder
- · Screw-fitted handle and locks

220248 Trolley flip

Trolley flight-suitable HDPE

470 x 220 x 360 mm













PPsafe****

- · Extremely durable polypropylene
- · Flight-suitable and break-proof
- · Impact and kick-proof
- · Ergonomic carry handle
- . Handle can be pulled out to use as a trolley
- Can be used in temperature ranges of -33°C to +90°C
- · Can be stacked

220311

Installation case Extreme

581 x 455 x 381 mm













Tool case trolley Extreme

517 x 277 x 217 mm

















Legend



ABS rigid case



max. maximum load



with document compartment





with lock



with combination lock



flight-suitable



air and water-tight



temperature range for use

Tool trolley HUPtransporter Pro

Roomy and organised - the HAUPA tool trolley HUPtransporter Pro provides a lot of space for tools

Extremely sturdy case: polypropylene (PP) housing, with gas pressure springs, fit for flight: automatic air pressure release valve, stackable, dust-proof, protected against water splashes, temperature stable from -30°C to +80°C, ergonomic two-component handle, eyelets for padlock, aluminium divider system, foam insert optional, colour: black, with owner label, tool trolley HUPtransporter 220820

Content:

- Safety goggles
 Wire stripper 0.2 6 mm²
- Uni wire stripper 0.2 4 mm² Crimping pliers 0.75 16 mm
- · Crimping pliers wire end ferrules 0.5 16 mm
- Crimping pliers insulated cable lugs 0.5 6 mm²
- VDE all-round soft grip scissors 160 mm, 70 mm²
- VDE crimping pliers, curved 200 mm
- VDE cable cutters 160 mm
 VDE diagonal cutters 160 mm
- VDE combination pliers 180 mm*
- VDE water pump pliers 240 mm
 VDE diagonal cutters 200 mm*
- · VDE pliers spanner 280 mm
- · VDE cable cutter Hook blade 50 mm
- · Switch cabinet spanner
- Cutter blades HUPblackSeries18
- Cutter blades HUPblades 18
- Wire cutter with hook blade 8 28 mm²
- · One-hand cable cutter max. Ø 34 mm
- · Deep-hole marker, 2 in 1, black, with sharpener
- · Electronic ESD side cutter without blade 115 mm
- · Hexagon head offset screwdriver set with ball head, 9 pcs, 1.5 - 10 mm, extra long
- VDE screwdriver HUPslim*
- PZ/FL1+2 | PZ1+2 | PH1+2
- VDE electrician's screwdriver HUPslim* 3.5 x 0.6 x 100, 4 x 0.8 x 100 mm,
 - 4 x 1 x 100 mm, 5.5 x 1 x 125 mm, 6.5 x 1.2 x 150 mm
- Electrician's chisel 10 x 250 mm
- Flat oval stone chisel 32 x 300 mm
- Ratchet ring spanner 4 in 1.8 x 10 + 12 x 13 mm
- Ratchet ring spanner 4 in 1, 10 x 13 + 17 x 19 mm
- · Enclosure spirit level 200 mm
- · Light metal spirit level 400 mm
- · Measuring tape 5 m · Scale 1 m
- · LED torch Pen Torch
- Locksmith's hammer 500 g
- · Puk saw with fixed handle
- Voltage tester Profi LED Plus 12 1.000 V
- FlexBagPro ratchet screwdriver set
- · PU cut protection glove level 3, grey, size 10













Art. no. 220821

49 pcs., 539 x 225 x 359 mm

NEW



PPsafe****



Exclusively in the tool trolley HUPtransporter Pro









10.94 kg









Tool trolley HUPtransporter StandardPlus

Roomy and organised - the HAUPA tool trolley HUPtransporter StandardPlus provides a lot of space for tools

Extremely sturdy case: polypropylene (PP) housing, with gas pressure springs, fit for flight: automatic air pressure release valve, stackable, dust-proof, protected against water splashes, temperature stable from -30°C to +80°C, ergonomic two-component handle, eyelets for padlock, aluminium divider system, foam insert optional, colour: black, with owner label, tool trolley HUPtransporter 220820

Contents:

- Basic wire stripper 0.5 6 mm²
 Uni wire stripper 0.2 4 mm²
- · Crimping pliers 0.75 16 mm
- · Crimping pliers wire end ferrules 0.5 16 mm
- Crimping pliers insulated cable lugs 0.5 6 mm²
- VDE all-round soft grip scissors 160 mm, 70 mm²
- VDE crimping pliers, curved 200 mm*
- VDE cable cutters 160 mm
 VDE diagonal cutters 160 mm

VDE power side cutters 200 mm*
 VDE pliers spanner 280 mm

- · VDE cable cutter straight blade
- · Switch cabinet spanner
- Cutter blades HUPblackSeries18
- Cutter blades HUPblades 18
- Stripper with hook blade 8 28 mm²
- · Basic stripper 4 13 mm
- · Deep-hole marker, 2 in 1, black, with sharpener
- · Electronic ESD diagonal cutters without blade 115 mm
- · Hexagonal offset screwdriver set with ball end, 9-piece | 1.5 - 10 mm, extra long
- VDE screwdriver HUPslim* PZ/FL1+2 | PZ1+2 | PH1+2
- VDE electrician's screwdriver HUPslim* 3.5 x 0.6 x 100. 4 x 0.8 x 100 mm. 4 x 1 x 100 mm, 5.5 x 1 x 125 mm, 6.5 x 1.2 x 150 mm
- Electrician's chisel 10 x 250 mm
- Flat oval stone chisel 32 x 300 mm
- · Switch cabinet spirit level 200 mm
- · Light metal spirit level 400 mm
- · Measuring tape 5 m Scale 1 m
- · LED torch Pen Torch
- · Locksmith's hammer 500 g
- · Puk saw with fixed handle
- Voltage tester Profi LED Plus 12 1.000 V
- · FlexBag ratchet screwdriver set
- · PU cut protection glove level 3, grey, size 10













44 pcs., 539 x 225 x 359 mm

NEW



PPsafe****









10,90 kg



Tool case trolley Start-up Mobil 1000 V

hard-side case, black, 2 tool sections, document pocket, combination lock, bottom half of case equipped with variable partitions, with high-grade fittings, 2 locks, case 220023.

Content:

- 2C-VDE electricians' screwdrivers
 2.5 x 75. 4 x 100. 5.5 x 125. 6.5 x 150 mm
- 2C-VDE cross slotted screwdrivers PH, size 1 + 2
- · 2C-VDE combination pliers, 180 mm*
- · 2C-VDE side cutters, 160 mm*
- 2C-VDE telephone pliers, 200 mm*
- 2C-VDE wire stripping pliers, 160 mm
- Wire stripper, hooked blade, 8 28 mm Ø
- · Cable knife, 1 blade
- . Engineers' hammer, 300 g
- · PUK pocket saw, fixed handle
- · Electricians' chisel, 10 x 250 mm
- · Paint scraper, 40 mm
- Voltage tester 120 250 V, loose
- · Measuring tape, 3 m
- · Water brushes











Art. no. 220252

ABS 🚓

20 pcs., 470 x 220 x 360 mm

10,94 kg









Tool case Start-up VDE 1000 V

hard-side case, black, 2 tool sections, document pocket, combination lock, bottom half of case equipped with variable partitions, with high-grade fittings, case 220031.

Content:

- 2C-VDE electrician's screwdrivers
 2.5 x 75, 4 x 100, 5.5 x 125 und 6.5 x 150 mm
- 2C-VDE cross slotted screwdrivers PH, size 1 + 2
- · 2C combination pliers, 185 mm*
- · 2C side cutters, 165 mm*
- · 2C telephone pliers, 200 mm*
- · 2C wire stripping pliers, 160 mm
- Wire stripper, hooked blade, 8 28 mm Ø
- · Cable knife, 1 blade
- · Engineers' hammer, 300 g
- · PUK pocket saw, fixed handle
- · Electricians' chisel, 10 x 250 mm
- · Paint scraper, 40 mm
- · Voltage testers
- · Measuring tape, 3 m
- · Water brush



Art. no. 220235

ABS **

20 pcs., 470 x 200 x 360 mm



★ 1000 V IEC 60900







8,64 kg

Tool case Jobstarter Plus

Robust hard case, black. Interior equipment: 2 tool boards, bottom plate with variable dividers, case 220028.

Content:

- · 2C-VDE telephone pliers, 200 mm*
- · 2C-VDE combination pliers, 180 mm*
- · 2C-VDE side cutters, 160 mm*
- Stripping pliers 0,5 4,0 mm²
- · Cable cutter VDE, straight
- Wire stripper, hooked blade, 8 28 mm Ø
- · PUK pocket saw
- · 2C-VDE electrician's screwdrivers,
- 2,5 x 75, 3,5 x 100, 5,5 x 125, 6,5 x 150 mm
- 2C-VDE cross slotted screwdrivers PH 1 + 2
- 2C-VDE cross slotted screwdrivers PZ 1 + 2
- · Voltage testers
- · Electricians' chisel, 10 x 250 mm
- · Stone chisels, flat oval shank
- · Engineers' hammer
- · Sledge hammer
- · Industrial ring brush, size 4
- · Paint scraper
- · Plaster cup

· Carpenters' pencil, 150 mm



25 pcs., 460 x 180 x 310 mm

















Tool case HUPactive

Hard case, black, 2 tool boards and document pocket completely removable, lockable, incl. 2 keys, bottom tray with variable dividers made of aluminium, reinforced metal corners for additional protection against damage, case 220030.

Art. no. 220255

24 pcs., 460 x 180 x 310 mm

ABS **

Contents:

- VDE electrician's screwdriver 1000 V
 3 x 0.5 x 100 mm | 4 x 0.8 x 100 mm | 5.5 x 1.0 x 125 mm
- VDE screwdriver PH, size 1 + 2
- VDE screwdriver PZ, size 1 + 2
- · VDE cable cutter 160 mm
- VDE side cutter 160 mm*
- · VDE stub nose pliers 200 mm*
- wire stripper Basic 0.5 4 mm²
- Basic wire stripper without hooked blade 8 28 mm² (safe work for trainees)
- · VDE cable knife 50 mm
- · voltage tester
- · switch cabinet spirit level 225 mm

FREE with every HUPactive!

- · original PUK pocket saw
- · fitter's hammer 300 g
- · painter's spatula 40 mm
- · plaster trough
- · industrial ring brush, size 4



9,62 kg

Tool case Elektro Plus

Hard case, black, lockable, incl. 2 keys, 2 tool boards and document pocket completely removable, base tray with variable aluminium dividers, reinforced metal corners as additional protection against damage, case 220036.

Art. no. 220257

ABS **

25 pcs., 460 x 180 x 310 mm

Contents:

- VDE electrician's screwdriver 1000 V 3 x 0.5 x 100 mm | 4 x 0.8 x 100 mm | 5.5 x 1.0 x 125 mm
- VDE screwdriver HUPslim PH. size 1 + 2*
- VDE screwdriver HUPslim PZ, size 1 + 2*
- VDE screwdriver HUPslim PZ/FL, size 2*
- VDE Snipe nose pliers DIN ISO 5745*
- · VDE diagonal cutters 160 mm*
- · VDE cable cutters 160 mm
- · Basic wire stripper 0.5 6 mm²
- · Basic wire cutter 8 28 mm
- Basic voltage tester 6 400 V
- XL stripper
- · Plaster mould
- · Puk saw with fixed handle
- · VDE cable knife, straight blade
- · Plasterer's hammer 300 g
- · Painter's spatula 40 mm
- · Industrial ring brush size 4
- · Scale 2 m
- · Carpenter's pencils
- · Torpedo spirit level 225 mm





6,50 kg









Tool case Start-up Max

hard-shell case, black, 2 tool sections, bottom half of case equipped with variable partitions, case 220028 Start-up S.

Content:

- 2C-VDE electricians' screwdrivers 2,5 x 75 mm, 4 x 100 mm, 5,5 x 125 mm, 6,5 x 150 mm
- 2C-VDE cross slotted screwdrivers PH, size 1 + 2
- · 2C-VDE combination pliers, 180 mm*
- 2C-VDE long chain nose pliers, 45° angled nose, 200 mm*
- · 2C-VDE side cutters, 160 mm*
- · 2C-VDE cable cutters, 160 mm
- · Cable knife VDE with a straight blade
- · Automatic wire stripper Super Plus 0,2 6 mm²
- Cable stripping knive 8 28 mm²
- · Voltage tester Profi LEDplus II 3 1.000 V
- Crimping pliers for end sleeves 0,25 2,5 mm²
- Dispenser box with insulated end sleeves, colour range III, DIN
- Combination spanners similar to DIN 3113, 8-pcs.
- Set ball point allen keys 9-pcs.,
 1,5 10 mm, extra long
- · Spanners for switch-cabinets HUPkey
- · LED Pen Torch
- · PUK pocket saw, fixed handle
- · Engineers' hammer, 300 g
- Carpenters' pencils
- · Measuring tape, 3 m











25 pcs., 460 x 310 x 180 mm



ABS **



9,22 kg



Tool case trolley EXTRA 1000 V

hard-side case, black, 2 tool sections, document pocket, combination lock, bottom half of case equipped with variable partitions, with high-grade fittings, 2 locks, case 220023.

Art. no. 220307

33 pcs., 470 x 220 x 360 mm

Content:

- · 2C-VDE screwdriver set PZ, 101999/PZ
- 2C-VDE cross slotted screwdrivers PH, size 1 + 2
- Automatic wire stripper Super Plus 0,2-6 mm²
- Voltagetester Basic black
- · Combination pliers VDE 185 mm*
- Heavy duty diagonal cutters VDE 205 mm*
- Long chain nose pliers VDE angled 200 mm*
- · Carpenters' pencils · Engineers' hammers 300 g
- Cable stripping knives without hook blade 8-28 mm²
- · Flectricians' chisels 10x250 mm
- · Hand saws PUK mit fixed handle
- · Torped-level 225 mm · Folding rules 2 m
- · Paint scrapers 40 mm · Water brushes · Plaster cups
- Cable knives 1000 V, 50 mm
 Siedge hammers 1000 g
- . Stone chisels, flat oval shank 28x250 mm
- · Industrial cleaning wipes
- · Crimping pliers crimping pliers for insulated terminals and end sleeves 0.5 - 6 mm
- Stripper 8-13 mm²
 Cable cutters VDE 170 mm
- Electrical insulating tape VDE 15 mm x 10 m, Rainbow pack, 263820, 10 coulors
- · Voltage tester Profi plus
- · HAUPA Multi Check digital high-capacity multimeter













Tool case trolly Master Mobil HUPslim 1000 V

Hard case, black, combination lock, 1 document compartment, 2 lockable locks, 2 tool boards, base tray with variable dividers, allround bumper strip, high-quality fittings. Case 220023.

Content:

- 2C VDE screwdriver set HUPslim PH*
- 2C VDE screwdriver set HUPslim PZ/FL 1 + 2*
- VDE cable cutter 230 mm*
- VDE combination pliers 180 mm*
- VDE diagonal cutters 160 mm*
- VDE Snipe nose pliers 45°, 200 mm*
- Wire strippers 0.2 6 mm²
- · VDE cable knife, straight blade
- · Industrial all-purpose cleaning cloths
- · Measuring tape 3 m
- · Puk saw with fixed handle
- · Earplugs green SNR 30 db
- · Retractable perlon tape 15 m, 3 mm
- LED torch 18 x 91 mm, 80 lm
- Uni wire stripper 0.2 4 mm²
- Hook blade stripper 8 28 mm²
- · Crimping pliers for insulated cable lugs and wire end ferrules
- · Cable cutter 160 mm, dip-insulated
- Crimping pliers 0.75 16 mm²
- · Profi Plus voltage tester
- · Safety goggles
- · Switch cabinet spanner
- · Bit box with safety bits, 58 pieces
- · Electronics ESD side cutter without blade, 115 mm
- · Rolling spanner 24 mm
- · 2K soft grip scissors 140 mm
- Cable ties black UV-resistant 250 x 4.8 mm
- · Cable gland IP68 M20 light grey
- · Wire end ferrules in a tin colour series III DIN
- · Nail clips 7-10, white





















Art. no. 220329

33 pcs, 470 x 220 x 360 mm





14,70 kg

Tool case trolly Master Mobil 1000 V

Hard-side case, black, 2 tool sections, document pocket, combination lock, bottom half of case equipped with variable partitions, with highgrade fittings, 2 locks, case art. 220023.

Art. no. 220254

ABS **

37 pcs., 470 x 220 x 360 mm

Content:

- · 2C VDE screwdriver set PH
- · VDE cable knife straight blade
- · Industrial all-purpose cleaning cloths
- Measuring tape 3 m
- · Puk saw with fixed handle
- · VDE cable cutter 230 mm
- · VDE combination pliers 185 mm*
- VDE diagonal cutters 165 mm*
- VDE snipe nose pliers 45°, 200 mm*
- Wire stripper 0.2 6 mm²
- · Earplugs green SNR 30 db
- · 2C VDE screwdriver PZ/FL 1
- 2C VDE screwdriver PZ/FL 2
- · Retractable nylon tape 15 mm, 3
- LED torch 18 x 91 mm, 80 lm
- Uni wire stripper 0.2 4 mm²
- Hook blade stripper 8 28 mm²
- · Crimping pliers for insulated cable lugs and wire end ferrules
- · Cable cutter 160 mm, dip-insulated
- Crimping pliers 0.75 16 mm²
- Bit box with safety bits, 58 pieces
- Safety goggles
- · Switch cabinet spanner
- Profi Plus voltage tester
- · Electronics ESD side cutter without blade, 115 mm
- Rolling spanner 24 mm
- · 2K soft grip scissors 140 mm
- · Cable gland IP68 M20 light grey
- · Wire end ferrules in a tin can Colour series III DIN
- Cable ties black UV-resistant 250 x 4.8 mm
- · Nail clips 7-10, white











14,70 kg
















hard-side case, black, 2 tool sections, document pocket, combination lock, bottom half of case equipped with variable partitions, with high-grade fittings, 2 locks, case 220023.

Content:

- · 2-component socket wrenches set
- · 2-component screwdrivers
 - 2,5 x 75, 3 x 100, 4x100, 4 x 125, 5 x 150 mm
- · Cross slotted screwdrivers PH, size 1 + 2, insulated
- Voltage tester Basic 6-400 V
- · Electronic screwing bit set, 34-pcs
- · HAUPA ratchet screwdriver Flex, 58-pcs.
- · Combination spanners sets, 12-pcs
- · Adjustable single-head wrench 24 mm
- · Spanners for switch-cabinets
- . Engineers' hammer, 300 g
- · Cable stripping knives with hook blade, 8-28 mm2
- · Utility knives EXTRA with spare blades 19 mm
- · Cable cutter with a snap, max. 16,9 mm
- · Cable cutter 160 mm, dipped
- · 2C combination pliers 185 mm*
- 2C diagonal cutter 165 mm*
- · 2C long chain nose pliers 200 mm*
- Automatic wire stripper Super Plus 0,2-6 mm²
- · ESD Electronic side cutter 115 mm
- Measuring tape 5 m
 Cabinet levels 250
- VDE electrical insulating tape 19 mm x 20 m, black (8x)





39 pcs., 470 x 220 x 360 mm















Tool case Delux Plus 1000 V

hard-side case, signal-red, with high-grade fittings, case 220076.

Content:

- 2C-VDE electrician's screwdriver
 2.5 x 75, 4 x 100, 5.5 x 125, 6.5 x 150 mm
- · 2C-VDE cross slotted screwdriver PH, size 1 + 2
- · VDE telephone pliers, coating insul., straight, 200 mm
- · VDE telephone pliers, coating insul., bent, 200 mm
- · VDE combination pliers, coating insul., 180 mm
- · VDE side cutters, coating insul., 160 mm
- · VDE wire stripping pliers, coating insul., 160 mm
- Socket wrenches 5.5, 7, 8, 10 mm
- · Voltage tester Profi Plus
- · Reversible ratchet, coating insul., 1/2"
- · T-sliding handle, coating insul., 1/2"
- Hexagon sockets, coating insul., 10, 11, 12, 13, 14, 15, 16
- Open end spanners, coating insul., 10, 12, 13, 19, 22, 24
- · 2C-VDE Cable knife
- · Cable scissors 200 mm, coating insul.
- Slip-on bushes 5-pieces No. 1, 10 mm
- · Slip-on bushes 5-pieces No. 2, 10 mm
- · Slip-on bushes 5-pieces No. 3, 10 mm
- · Plastic pliers, 180 mm
- · Plastic clamp
- · Covering tape, grey
- · Covering tape, red
- Safety grip
- · Gloves size 9

★ 1000 V IEC 60900



Art. no. 220239

ABS+ **

43 pcs., 460 x 180 x 310 mm



Service-Trolley E-Mobility

hard-side case, black, 2 tool sections, document pocket, combination lock, bottom half of case equipped with variable partitions, with high-grade fittings, 2 locks, case 220023.

Content:

- · 2C-VDE electrician's screwdrivers 2.5 x 75, 3 x 100, 3.5 x 100, 4 x 100 mm
- · 2C-VDE cross slotted screwdrivers PH 1, 2, 3
- 2C-VDE cross slotted screwdrivers S-Tx 20, 25, 30
- Hexagon sockets VDE 3/8" WS 8, 9, 10, 12, 13, 14, 17, 19, 22
- Extension 3/8" VDE, 250 mm
- Reversible ratchet VDE 3/8"
- · Water pump pliers VDE 240 mm
- · Cable cutters VDE 230 mm
- Side heavy duty side cutters VDE 205 mm*
- Side cutters VDE 165 mm*
- Short flat nose pliers VDE 160 mm
- · Long chain nose pliers, angled nose 200 mm*
- Combination pliers VDE 205 mm*
- · Cable stripping knife 1000V, straight blade, 50 mm
- · Safety-sets with bag, insulating mat
- · Slip on bushes 1000V, 12 mm
- Slip on bushes 1000V. 10 mm
- VDE-sockets 3/8", M8, M10, M12
- · Shutting band red/white 500 m
- Sign DANGEROUS VOLTAGE
- Sign DO NOT SWITCH
- Sign CAUTION BATTERIES























Art. no. 220171

ABS **

40 pcs., 470 x 220 x 360 mm













SysCon HUPeMobility

Contents:

- ABS-Box SysCon S ABS-Box SysCon M
- · ABS-Box SysCon XL with divider
- · Tool board SysCon 11 compartments
- · Rolling board universal for SysCon
- · Digital multimeter Multi Check III
- Voltage tester Profi LED Plus II 6 1000 V
- VDE-electrician's screwdriver HUPslim*
 3.5x0.6x100 mm | 4.0x0.8x100 mm
 5.5x1.0x125 mm | 6.5x1.2x150 mm
- VDE-screwdriver HUPslim PH 1 + 2*
- VDE-universal pliers 180 mm*
- VDE-wire cutter 160 mm*
- · VDE-pliers wrench 280 mm
- · VDE-pantograph pliers straight*
- VDE-installation pliers
- · VDE-finger gloves 1000 V Gr. 10
- · Electrician's shield EN 166
- · Self-clamping sleeves 10, 20, 30 mm
- · Reversible ratchet 200 mm, 3/8"
- T-spanner wrench 200 mm, 3/8"
- Extensions 150 and 250 mm, 3/8"
- Socket wrench inserts 3/8" 8, 10, 12, 13, 14, 17, 19, 22 mm
- Inserts for socket screws 3/8" 4, 5, 6, 8 mm
- VDE-insert 3/8" eco, long WS 8, 10, 12, 13, 14, 17, 19 mm
- VDE-insert 3/8" XZN M8, M10, M12 eco
- Sign DANGEROUS VOLTAGE
- Sign DO NOT SWITCH
- Sign CAUTION BATTERIES



52-pcs.





Service bag HUPsmartHome

Document compartment, compartments for tools and instruments, small pocket, big compartments, rubber loops, separate well protected main compartment for laptop and documents, additionally divided with removable centre wall. Notebook compartment up to 15". Colour: green, black. Case 220292.

Nylon

Content:

- Combination pliers 180 mm*
- · Side cutters 160 mm*
- · Long chain nose pliers 45°, 160 mm*
- Screwdrivers set HUPslim 1000 V PH*
- Screwdrivers set HUPslim 1000 V PZ/FL*
- Stripper Allrounder 4 15 mm²
- Cable stripper Top Coax Plus 4,8 7,5 mm²
- · Perlon fish tapes, 15 m x 3 mm
- Spanners for switch-cabinets, HUPkey
- · Water pump pliers 170 mm
- · Folding rules
- · Aluminium spirit levels 400 mm
- · Carpenters' pencils
- · Engineers' hammer 300 g
- · Electricians' chisels 10 x 250 mm
- · Voltage tester Basic +
- · Crimping pliers for modular plugs
- · Cable stripping knives
- · Sensor Tool LSA
- · Crimping pliers HUPsquare10 0.08 - 10 mm²
- · Hand saw PUK
- · Ratchet screwdriver set FlexBag
- · ESD Electronic side cutter without cutting-facet



Art. no. 220805

31 pcs.

















Art. no. 220293 Service bag Supply Max 1000 V 31 pcs. Document compartment, compartments for tools and instruments, small pocket, big compartments, rubber loops, separate well protected main compartment for laptop and documents, additionally divided with removable centre wall. Nylon Notebook compartment up to 15". Colour: green, black. Content: · 2C-VDE electrician screwdriver 2.5x75, 3.5x100, 4x100, 5.5x120, 6.5x150 • 2C-VDE screwdriver PH 1 + 2 2C-VDE screwdriver PZ/FL 1 + 2 · 2C-VDE diagonal cutters 165 mm* · 2C-VDE combination pliers 185 mm* · 2C-VDE telephone pliers straight, 200 mm* · Cable cutter 160 mm, dipped · ESD diagonal cutter 115 mm · Automatic stripper 0.08-6.0 mm² · LED Head lamp 75 lm · Utility knives EXTRA with spare blades Voltage tester Profi LCD Plus 6-1.000 V · VDE cable stripping knife changeable blade, 50 mm · Electricians Scissor stainless steel, 150 mm · Control cabinet key · Measuring tape 3 m · Adjustable single-head wrench · Electronic screwdriver assortment, 34 pcs. · Industrial cleaning wipes, 40 pcs. · Cable ties black UV-resistant 203x4.6 mm · Cable ties natural 203x4.6 mm · Electrical insulating tape VDE 15 mm x 10 m, Rainbow pack · HAUPA Flex Bag · Set X-Crimp 1000 V IEC 60900 cutting force 9,55 kg

... convincing solutions











HAUPA ToolBag 1000 V

Tool bag with inner and outer tool compartments, rubberreinforced base. Waterproof and dirt resistant, double crossseam for heavy loads, removable shoulder strap, adjustable, 10 compartments outside (various sizes), 10 compartments inside (various sizes), belt for spirit level (outside), material: extra strong 600D polyester, colour: black/green. ToolBag 220061.

Content:

- 2C-VDE combinations pliers, 185 mm*
- · 2C-VDE side cutters, 165 mm*
- · 2C-VDE telephone pliers, straight, 200 mm*
- · 2C-VDE wire stripping pliers, 160 mm
- · 2C-VDE electrician's screwdrivers,
- 2.5 x 75, 4 x 100, 5.5 x 125, 6.5 x 150 mm
- 2C-VDE cross slotted screwdrivers PH, size 1 + 2
- · Spanners for switch-cabinets
- · Cable knife
- · Voltage tester Basic



Art. no. 220510

14 pcs., 320 x 190 x 280 mm

HAUPA ToolBag XL Go

Tool bag XL with inner and outer tool compartments, rubberreinforced base. Features: Waterproof and dirt resistant, rubberreinforced base, double cross-seam for heavy loads, removable shoulder strap, adjustable, 10 compartments inside/outside (various sizes), belt for spirit level (outside), material: extra strong 600D polyester, colour: green, black. ToolBag 220366.

Content:

- · VDE combinations pliers, 185 mm*
- VDE heavy duty side cutters, 170 mm*
- · VDE telephone pliers, straight, 200 mm*
- 2C-VDE electrician's screwdriver PZ/FL 1 + 2
- 2C-VDE electrician's screwdriver 2,5 x 75, 3,5 x 100, 4 x 100, 6.5 x 150 mm
- 2C-VDE cross slotted screwdrivers PH 1 + 2
- Automatic wire stripper 0,2-6 mm²
- · Switching cabinet key
- Cable stripper hooked blade, 8 28 mm Ø









perfected cutting force performance







15 pcs., 420 x 220 x 310 mm
















HAUPA SquareBag Basic 1000 V

Tool bag made of 600D Polyester, with inner and outer tool compartments, with padded carrying strap, rubber-reinforced base, double cross-seam for heavy loads. ToolBag 220703.

Content:

- Automatic wire stripper Super Plus 0,2 6 mm²
- 2C-VDE electricians' screwdrivers HUPslim*
 4 x 100 mm. blade thickness 0.8 and 1.0 mm
- 2C-VDE electricians' screwdrivers HUPslim PH, size 1 + 2*
- 2C-VDE electricians' screwdrivers HUPslim PZ/FL, size 2*
- VDE telephone pliers 45°, 200 mm*
- VDE side cutters 160 mm*
- · VDE combination pliers 180 mm*
- · Measuring tape 3 m
- PU textile gloves, size 9

Art. no. 220706

12 pcs., 260 x 260 x 230 mm



220706 | 360

















5,70 kg

Werkzeughalter für Baueimer

Tool bag for hanging up/covering in a commercially available 10 l bucket, 30 exterior pockets/compartments, 14 inner pockets/ compartments, 1 hammer loop, 1 loop with carabiner, stainresistant, double cross-seam stitching for high load capacity, material: extra strong 1680D polyester, colour: black, green.

Art. no. 220313

460 x 280 x 40 mm





Supplied without buckets



HAUPA SquareBag

Tool bag made of 600D Polyester

- · compact design and low weight
- · with inner and outer tool compartments
- · rubber-reinforced base as protection against dirt and moisture
- · double cross-seam for heavy loads
- · carrier bar of metal, for high wearing comfort
- · removeable carrying strap, padded
- · additional pockets of polyester with hook of metal and velcro fastening
- · Material: extra strong 600D Polyester, water resistant and dirt-repellent
- · colour: black with green stitching



260 x 260 x 230 mm









HAUPA ToolBag

Tool bag with inner and outer tool compartments, rubberreinforced base. Waterproof and dirt resistant, double cross-seam for heavy loads, removable shoulder strap, adjustable, 10 compartments outside (various sizes), 10 compartments inside (various sizes), belt for spirit level (outside), material: extra strong 600D polyester, colour: black/green.

Art. no. 220061

320 x 190 x 280 mm







1,51 kg

HAUPA ToolBag XL

Tool bag XL with inner and outer tool compartments, rubber-reinforced base. Features: waterproof and dirt resistant, rubber-reinforced base, double cross-seam for heavy loads, removable shoulder strap, adjustable, 10 compartments inside/outside (various sizes), belt for spirit level (outside), material: extra strong 600D polyester, colour: black with green seams.

Art. no. 220366

310 x 420 x 220 mm













Tool case trolly Start-up Profi

Rigid case, made of ABS-plastic material, black, integrated rolls and pull-out handle in the bottom, locks of alu-press-casting, empty.

Inside: 1 separation for documents, 1 plate for tools, 1 coverplate with pocket compartments and clip-compartment, 1 bottom-tray



470 x 220 x 360 mm











Tool trolley HUPtransporter

Roomy and organised - the HAUPA tool trolley HUPtransporter provides a lot of space for tools

With an additional tool tray, the tool trolley HUPtransporter offers an enormous amount of space for tool storage. The boards are clearly arranged, allowing easy access to tools at all times. Stable pockets and loops ensure that each tool reliably stays in its assigned spot, unless it is needed.

Content:

- Extremely sturdy case: polypropylene (PP) housing
- · With gas pressure springs
- · Fit for flight: automatic air-pressure release valve
- Stackable
- · Dust-proof
- · Protected against water splashes
- . Temperature stable from -30°C to +80°C
- Ergonomic two-component handle
- · Eyelets for padlock
- · Aluminium divider system
- · Foam insert optional
- · Colour: black
- · With owner label



Art. no. 220820

539 x 225 x 359 mm



PPsafe****















Assortment boxes 2025



End sleeve assortment

Content: 5.100 insulated end sleeves,

1 crimping pliers (art. no. 210804), crimp 0,5 - 10 mm², in plastic bulk storage chest 415 x 335 x 90 mm

Description	Length mm	CS mm ²
Twin end sleeves	8	0,5
Twin end sleeves	8	0,75
Twin end sleeves	8	1
Twin end sleeves	8	1,5
Twin end sleeves	10	2,5
Twin end sleeves	12	4,0
Twin end sleeves	14	6,0
insulated end sleeves	8	0,5
insulated end sleeves	8	0,75
insulated end sleeves	8	1
insulated end sleeves	8	1,5
insulated end sleeves	8	2,5
insulated end sleeves	10	4
insulated end sleeves	12	6
insulated end sleeves	12	10
	Twin end sleeves insulated end sleeves	Twin end sleeves 8 Twin end sleeves 8 Twin end sleeves 8 Twin end sleeves 8 Twin end sleeves 10 Twin end sleeves 12 Twin end sleeves 14 insulated end sleeves 8 insulated end sleeves 10 insulated end sleeves 10 insulated end sleeves 10 insulated end sleeves 12

Art. no. 270888

Serie DIN



Art. no. 270890 Serie II (german)













Assortment for Combi-Crimp

Content: 2.700 insulatet end sleeves, 1.100 insulatet terminals, 1 crimping pliers (210784) for insulated terminals $0.5 - 2.5 \text{ mm}^2$ and end sleeves $0.5 - 6 \text{ mm}^2$, in plastic bulk storage chest $415 \times 335 \times 90 \text{ mm}$

Qty.	Description	Length mm	CS mm ²	M
500	insulated end sleeves	8	0,5	
500	insulated end sleeves	8	0,75	
500	insulated end sleeves	8	1	
500	insulated end sleeves	8	1,5	
500	insulated end sleeves	8	2,5	
100	insulated end sleeves	10	4	
100	insulated end sleeves	12	6	
200	insulated butt connectors		0,5-1,0	
200	insulated butt connectors		1,5-2,5	
100	insulated socket sleeves		0,5-1,5/6,3x0,8	
100	insulated socket sleeves		1,5-2,5/6,3x0,8	
100	insulated ring terminals		0,5-1,0	M4
100	insulated ring terminals		0,5-1,0	M5
100	insulated ring terminals		1,5-2,5	M4
100	insulated ring terminals		1,5-2,5	M5
100	insulated ring terminals		1,5-2,5	M6

Art. no. 270895

Serie DIN




Serie I (french)

Art. no. 270897

Serie II (german)







Assortment of tubular cable lugs, standard

Content: 380 cable lugs,

1 crimping pliers (art. no. 210805), crimp standard 6 - 50 mm², hexagon crimping, in plastic bulk storage chest 415 x 335 x 90 mm

Qty.	Description	CS mm ²	M	Art. no.
50	cable lugs, standard, tinned	6	M6	290934
50	cable lugs, standard, tinned	6	M8	290936
50	cable lugs, standard, tinned	10	M6	290940
50	cable lugs, standard, tinned	10	M8	290942
30	cable lugs, standard, tinned	16	M8	290952
40	cable lugs, standard, tinned	16	M10	290954
25	cable lugs, standard, tinned	25	M8	290960
25	cable lugs, standard, tinned	25	M10	290962
20	cable lugs, standard, tinned	35	M8	290968
20	cable lugs, standard, tinned	35	M10	290970
20	cable lugs, standard, tinned	50	M8	290978

Art. no. 290380

6 - 50 mm², standard















Assortment boxes with metal catch and pick boxes

- made of black plastic, including small part boxes
- · transparent lid closes tightly
- · contents do not become mixed up
- stackable
- · ergonomic shape, hinged handle
- · feet for upright storage
- · catch fasteners with metal brackets
- · oil and grease-repellent

Content:

- 6 Boxes 49 x 49 x 72 mm
- 11 Boxes 49 x 98 x 72 mm
- 2 Boxes 98 x 98 x 72 mm
- 2 Boxes 98 x 148 x 72 mm



Base plate:

Secures and affixes the boxes to prevent slipping



Easy reordering article number and barcode

on every box





Art. no. 221131

Art. no. 221133


w/o boxes, 415 x 335 x 90 mm

415 x 335 x 90 mm

Box S | Box M | Box L | Box XL

conical design for stacking with snap on base plate (Art. no. 221138)

 Mix of PP and calcium carbonate makes the boxes oil and grease repellent





Art. no. 221134

49 x 49 x 72 mm



Art. no. 221135

98 x 49 x 72 mm



Art. no. 221136

98 x 98 x 72 mm



Art. no. 221137

148 x 98 x 72 mm





haupa.com





Highlights 2025



Cable cutter VDE HUPtriCut

- · for cutting copper/aluminium cables, fine wire, multiple-core and solid copper
- · Chrome vanadium steel, dip-insulated handles
- · insulating function in upper head area
- · Cable measuring function thanks to the 180 degree crossover of the legs
- · not for solid conductors

Art. 211225 (Art. 211223)

- Data, telephone and control cable, maximum Ø 8 mm (Ø 12 mm)
- Cu single wire, maximum 16 mm2 (16 mm2)
- Cu fine wire, maximum 16 mm2 (35 mm2)
- · Cu multi-wire, maximum 16 mm2 (25 mm2)
- Al single wire, maximum 16 mm² (25 mm²)
- Al multi-wire, maximum Ø 8 mm = 16 mm² (25 mm²)

Art. no. 211225

Ø 8 mm. 160 mm

Art. no. 211223

Ø 12 mm, 200 mm




















haupa.com





Cable cutter HUPtriCut

- for cutting copper/aluminium cables, fine wire, multiple-core and solid copper
- · Chrome vanadium steel, dip-insulated handles
- · insulating function in upper head area
- Cable measuring function thanks to the 180 degree crossover of the legs
- · not for solid conductors

Art. 201085 (Art. 201087)

- Data, telephone and control cable, maximum Ø 8 mm (Ø 12 mm)
- Cu single wire, maximum 16 mm2 (16 mm2)
- Cu fine wire, maximum 16 mm² (35 mm²)
- Cu multi-wire, maximum 16 mm² (25 mm²)
- Al single wire, maximum 16 mm2 (25 mm2)
- Al multi-wire, maximum Ø 8 mm = 16 mm² (25 mm²)



16 mm² / Ø 8 mm

Art. no. 201087

35 mm² / Ø 12 mm







Art. no. 201087

Ø Ø














- · One-handed cable cutters for fine wire cables only
- · Low force required
- · CNC-ground cutting
- · Inductively hardened blades
- · Adjustable screw joint
- Cu fine wire cable, maximum Ø 16.9 mm = 70 mm²

Art. no. 201002

70 mm² / Ø 16,9 mm















Pliers wrench VDE

- · Stepless gripping of all wrench widths thanks to the parallel jaws
- · Easy tightening and releasing of screw connections
- · Weight-reduced for very light working that is gentle on the joints
- · Secure setting of the gripping jaws prevents the joint slipping through
- Gentle on surfaces thanks to the smooth, polished gripping surfaces
- · 10-fold manual force amplification for very high clamping force
- · With comfortable single-hand adjustment pushbutton
- · With finger clamp protection for safe working
- . Chrome-vanadium tool steel ensures high durability and a long product life
- Individually tested acc. to DIN EN IEC 60900 for working safely on live parts



Length: 280 mm | WS: 50 mm



















PLIERS AND WRENCH IN ONE Gripping | Holding | Pressing | Bending workpieces

These 3 pliers wrenches are new in our portfolio for 2022. The VDE pliers wrench (art. 211224) and the pliers wrench from the basic program (art. 210619) are 260 mm long and replace wrench sets from 0 to 50 mm. The third model is the smaller and even more handy variant of the basic pliers wrench (art. 210615); it is 180 mm long and makes wrench sets of up to 36 mm.

Versatile, flexible, safe, light and gentle on the joints – make things easy and profit from the many benefits of our new pliers wrench!



Pliers wrench

- Stepless gripping of all wrench widths thanks to the parallel jaws
- · Easy tightening and releasing of screw connections
- Weight-reduced for very light working that is gentle on the joints
- Secure setting of the gripping jaws prevents the joint slipping through
- Gentle on surfaces thanks to the smooth, polished gripping surfaces
- 10-fold manual force amplification for very high clamping force
- · With comfortable single-hand adjustment pushbutton
- · With finger clamp protection for safe working
- Chrome-vanadium tool steel ensures high durability and a long product life
- · Handles in black/green soft dip insulated



Hand cable cutters Ø 34 mm

- Designed for cutting copper and aluminium cables according to DIN EN 60228
- · Equipped with ratchet gear transmission
- · Provides optimal force transmission
- · Enables one-handed operation through optimal lever ratio and step-by-step cutting up to Ø 34 mm
- · Release mechanism available in every cutting position

Material:

- · All parts made from high-strength special steel, with hardened or tempered cutting edges and stressed components
- · Burnished surfaces
- · Ergonomically shaped soft handles
- · Colour: black/green

Cutting range:

- Cables and insulated conductors according to DIN EN 60228
- Multi-stranded cables (Class 2; Class 5) copper up to 300 mm² (sector-shaped, fine-stranded, communication/data)
- Multi-stranded cables (Class 2; Class 5) aluminium up to 380 mm² (sector-shaped, fine-stranded, communication/data)
- · Not suitable for steel or ACSR cables
- · Clean the ratchet mechanism after use

Dimensions:

Length: approx. 260 mm | Width: approx. 100 mm | Depth: approx. 36 mm | Weight: approx. 600 g











single wire wire rope multi-wire armoured steel cable (SWA) sector-shaped **ACSR** fine wire bolt solid communication steel

Art. no. 200089-1

up to Ø 34 mm









0





The new hand cable cutters, models 200089-1 and 200183-1, featuring ratchet gear transmission, are designed for cutting copper and aluminium cables according to DIN EN 60228, with diameters of up to 34 mm and 62 mm respectively. With their carefully calibrated lever ratio, these hand cable cutters ensure optimal force transmission, allowing for effortless step-by-step cutting with just one hand. These cable cutters are equipped with ergonomically shaped soft handles, providing a comfortable grip during operation. They also feature a release mechanism that can be used in any cutting position. All parts of the cutters are made from high-strength special steel. The cutting edges and other stressed components are either tempered or hardened, while the surfaces are treated with a burnished finish. **Our new hand cable cutters are suitable for fine-stranded conductors too!**

Hand cable cutters Ø 62 mm

- Designed for cutting copper and aluminium cables according to DIN EN 60228
- · Equipped with ratchet gear transmission
- · Provides optimal force transmission
- Enables one-handed operation through optimal lever ratio and step-by-step cutting up to Ø 62 mm
- · Release mechanism available in every cutting position

Material:

 All parts made from high-strength special steel, with hardened or tempered cutting edges and stressed components

- · Burnished surfaces
- · Ergonomically shaped soft handles
- · Colour: black/green

Cutting range:

- Cables and insulated conductors according to DIN EN 60228
- Multi-stranded cables (Class 2; Class 5) copper up to 480 mm² (sector-shaped, fine-stranded, communication/data)
- Multi-stranded cables (Class 2; Class 5) aluminium up to 480 mm² (sector-shaped, fine-stranded, communication/data)
- · Not suitable for steel or ACSR cables
- · Clean the ratchet mechanism after use

Dimensions:

Length: approx. 297 mm | Width: approx. 163 mm | Depth: approx. 36 mm | Weight: approx. 800 g















Battery powered cable cutter AS-52

- · for copper and aluminium cable, multi wire
- · diameter up to 52 mm

Scope of delivery:

1 cutting tool, 1 quick charger, 1 battery 18 V Li-lon, 4 Ah, in SysCon tool box















Art. no. 216434-1

Ø 52 mm



Battery powered cable cutter AS-52F

- · for copper and aluminium cable
- · with blades for fine-stranded cables

Scope of delivery:

1 cutting tool, 1 quick charger,

1 battery 18 V Li-lon, 4 Ah, in SysCon tool box















Ø 52 mm











Battery powered cable cutter AS-52ACSR

- Diameter 18,6 mm /120 mm²
- · ACSR 19 mm steel cables
- · not suitable for Cu/Al

Scope of delivery:

1 cutting tool, 1 quick charger, 1 battery 18 V Li-Ion, 4 Ah, in SysCon tool box











Li-ION 18V 4Ah

Art. no. 216436-1

Ø 18,6 mm



Battery powered cable cutter AS-65

- for copper and aluminium cable, multi wire
- diameter up to 65 mm

Scope of delivery:

1 cutting tool, 1 quick charger,

1 battery 18 V Li-lon, 4 Ah, in SysCon tool box

















Art. no. 216435-1

Ø 65 mm



Cable stripper Kabifix

- For cutting opening and stripping cables from Ø 6 25 mm
- · Longitudinal and round cut
- Ø 6 28 mm NYY 4 16 mm² NYM 5 16 mm²
- · Coaxial and bell round cable
- Isoflex and PVC piping maximum Ø 25 mm
- · Interior adjustment screw for adjusting the cutting depth
- · Exchangeable blades



Ø: 6 - 28 mm





Cable stripping knive

- · For removing the sleeve from all current round cables
- · Blades, titanium nitride coated, thanks to the higher cutting speed
- · Lower wear, increased durability
- · Cutting depth can be adjusted using the setting screw on the end of the handle
- Automatic adjustment to round and lengthwise cuts
- · Handle security thanks to soft component insert on the bar and handle
- · Titanium nitride coated replacement blade in the
- · Housing made from high-quality, hard wearing polyamide
- · With titanium nitride coated hook blade

Art. no. 200031

Ø: 8 - 28 mm















Stripper All-rounder

- Cable stripper for round cables from Ø 4 15 mm and flat cables up to 15 mm width
- Stripping 1.5 2.5 mm² single wire
- · Lengthwise cut



Art. no. 200050

Ø: 4 - 15 mm





Universal stripper

- Stripper for removing the sleeve from all current round cables Ø 8 to 13 mm
- · Removing the insulation on various cable types, e.g. NYM 3 x 1.5 mm² to 5 x 2.5 mm²
- · Contoured blades for stripping wires 0.2 - 0.3 - 0.8 - 1.5 - 2.5 - 4.0 mm²
- · Ideal for working in distribution and junction boxes
- · Longer cable lengths can be stripped using the lengthwise cutting mechanism
- · Safe hold thanks to the inclusion of anti-slip handle zones
- · No need to set blades required to cutting depth
- · Additional titanium nitride coated retractable blade

Art. no. 200043

Ø 8 - 13 mm





Automatic cable stripper

- for stripping fine wires and solid cables 0.03 10 mm²
- · automatic setting to the cross-section
- · integrated side cutter of up to 6 mm2
- · With stripping lengthwise stop

Art. no. 211934

0.03 - 10 mm²



Automatic cable stripper


- · for stripping fine wires and solid cables 0.08 - 6 mm² | 6 - 16 mm²
- · automatic setting to the cross-section
- · integrated side cutter of up to 6 mm2
- · With stripping lengthwise stop

Art. no. 211930

 $0.08 - 6 \text{ mm}^2$

Art. no. 211932

6 - 16 mm²



for solid and flexible conductors and strands between 0.2 and 6.0 mm² (AWG 24 - 10)

- · For fast and precise stripping even of difficult to-access places
- · No adjustment to wire cross section necessary
- Suitable for cables with insulation made from PVC and other materials
- · Special scanning system, therefore no damage to conductors
- Adjustable longitudinal stop from 6.0 to 15.0 mm for even serial stripping
- External side cutters for conductors up to 2.5 mm²
- · Body of pliers made from fibre-glass reinforced polyamide



 $0.2 - 6 \text{ mm}^2$





haupa.com









Crimping pliers for end sleeves

Art. no. 211816


Art. no. 211818


precise crimping profile, automatic setting to the conductor crosssection, unlockable forced lock, guarantees connections that meet DIN, high transmission and ergonomically shaped

plastic handles for fatigue free working.

211816 square pressing

0.08 - 16 mm² 0,08 - 16 mm²







Crimping pliers HUPsquare10

for end sleeves, precise square pressing profile, automatic setting to the conductor cross-section, unlockable forced lock, guarantees connections that meet DIN, high transmission and ergonomically shaped plastic handles for fatigue free working, square pressing. TWIN 2x4 mm²



0,08 - 10 mm²





Crimping pliers HUPsquare16

for end sleeves, precise square pressing profile, automatic setting to the conductor cross-section, unlockable forced lock, guarantees connections that meet DIN, high transmission and ergonomically shaped plastic handles for fatigue free working, square pressing. TWIN 2x4 mm²



0,5 - 16 mm²







Dispenser box with insulated end sleeves (DIN)

Contents: Colour range III, DIN

50	pcs	white,	0,5 mm ² ,	art. 270800
100	pcs	grey,	0,75 mm ² ,	art. 270802
100	pcs	red,	1,0 mm ² ,	art. 270804
100	pcs	black,	1,5 mm ² ,	art. 270807
50	pcs	blue,	2,5 mm ² ,	art. 270810



Art. no. 270854

400 pcs





Dispenser box with Twin end sleeves (DIN)

Contents: Twin end sleeves, Colour range III, DIN

50 pcs	grey,	0,75 mm ² ,	art. 270780
50 pcs	red,	1,0 mm ² ,	art. 270784
50 pcs	black,	1,5 mm ² ,	art. 270788
50 pcs	blue.	2.5 mm ² .	art. 270792



Art. no. 270795

200 pcs





Slide Box with DIN end sleeves

The transparent sliding lids enable easy access and prevent the contents from becoming mixed up. 5 separate compartments. Dimensions: 165 x 58 x 38 mm (L x W x H)

Contents: Colour range III, DIN

50 pcs	white,	0,5 mm ² ,	art. 270800
100 pcs	grey,	0,75 mm ² ,	art. 270802
100 pcs	red,	1,0 mm ² ,	art. 270804
100 pcs	black,	1,5 mm ² ,	art. 270807
50 pcs	blue,	2,5 mm ² ,	art. 270810



Art. no. 270864

400 pcs







haupa.com







HUPcompact HC01

- · for insulated cable lugs and connectors
- · oval pressing







Art. no. 213090

Ø: 0,1 - 6 mm²







LONG LIFE 50000







HUPcompact HC02

Art. no. 213088

Ø: 0,25 - 16 mm²

- · for end sleeves
- · trapezoidal pressing
- (10 + 16 mm² wave profile/0.5 6 mm² trapezoidal profile)



100 % parallel



LONG LIFE 50000





HUPcompact HC03

- · for non insulated cable lugs and connectors
- · mandrel shape pressing





100 % parallel



LONG LIFE 50000 Х



Art. no. 213092

Ø: 0,75 - 10 mm²





HUPcompact HC04

- · for open brass tab connectors
- · with locator
- · roll pressing



100 % parallel

5 kN LONG LIFE 50000




Art. no. 213094

Ø: 0,5 - 6 mm²









Crimpset X-Crimp



Art. no. 211692

Including nylon bag

Crimping pliers used to quickly change HAUPA precision pressing inserts. Supplied in robust nylon bag (article 220260).

- · Reliable crimping results just like with fixed pressing inserts
- · Forced lock ensures standardised pressing actions
- · Flat construction enables you to work precisely even when space is at a premium

haupa

Content:

Art. 211690

Art. 210763/E

MALL

0.5 - 4 mm²

М 210

Art. 210765/E

6-16 210 mm²

Art. 210764/E

М 210

Art. 210761/E

mm² 0.5-6 mm²

1-10











Battery powered crimping tool SDE 240-6M

Crimping head can be rotated by 180°, with fast opening, return manually once compressing is complete, no inserts required, mandrel shape pressing.

Extent of supply:

- 1 crimping tool,
- 1 charger,
- 1 battery,
- 1 strap,
- in SysCon stacking box SysCon M art. 220372 without inserts.

Technical data:

- · Pressing force in kN: 60
- · Working pressure in bar: 700
- · Head can be opened: yes
- · Pressing time, battery-operated in seconds: ca. 5
- · Battery charging time in minutes: 30
- · Battery type: Li-lon, 18 V, 2 Ah
- With the new HAUPA battery item no. 215523 and charger item no. 215527
- Cable lugs: standard Cu 10 240 / DIN AI 50 240 mm²
- Connectors: standard Cu 10 240 / DIN AI 50 240 mm²
- · Crimp ring terminals without insulation DIN 46234
- Dimensions: 455 x 75 mm





HAUPA batteries are compatible with the MAKITA charging technology and can be used in all 18 V Li-ion systems.

Variant 216669-1 contains:

- Machine
- · System case incl. insert
- · Battery and charger





Variant 216669-1-NO contains:

- Machine
- · System case incl. insert
- . No battery and no charger

SysCon



Art. no. 216669-1

Base Tool

incl. battery and charger in case



Art. no. 216669-1-N

Base Tool

Machine in transport packaging



Art. no. 216669-1-NO

Base Tool

without battery, without charger



Variant 216669-1-N contains:

· Machine in transport packaging









Battery powered crimping tool SDE 240-6M

Sensor

Crimping head can be rotated by 180°, with fast opening, return manually once compressing is complete, no inserts required, mandrel shape pressing.

Extent of supply:

- 1 crimping tool,
- 1 charger,
- 1 battery.
- 1 strap.

in SysCon stacking box SysCon M art. 220372 without inserts.

Technical data:

- · Pressing force in kN: 60
- · Working pressure in bar: 700
- · Head can be opened: yes
- · Pressing time, battery-operated in seconds: ca. 5
- · Battery charging time in minutes: 30
- · Battery type: Li-lon, 18 V, 2 Ah
- · With the new HAUPA battery item no. 215523 and charger item no. 215527
- Cable lugs: standard Cu 10 240 / DIN AI 50 240 mm²
- Connectors: standard Cu 10 240 / DIN AI 50 240 mm²
- Crimp ring terminals without insulation DIN 46234
- · Dimensions: 455 x 75 mm

With the different colours of the sensor LED, it shows whether the pressing has been completed successfully or which errors have occurred:

- Light is green: Pressing completed as standard, motor stopped.
- Light is orange: Battery voltage
 - not sufficient
- Light is red: Pressing interrupted before completed

The device also has 1 white LED designed to illuminate the working area.













18V





Art. no. 216669/M-1

Base Tool

incl. battery and charger in case



Art. no. 216669/M-1-N

Base Tool

Machine in transport packaging



Art. no. 216669/M-1-NO

Base Tool

without battery, without charger











Smart Battery powered crimping tool universal US-6M

Sensor

Hydraulics for interchangeable pressing tools, crimping head can be rotated by 180°, with fast opening, manual return flow after perfect pressure.

· for 7 different interchangeable heads

(item no. 216761, item no. 216762, item no. 216762/32ACSR, item no. 216763, item no. 216764, item no. 216665-U, item no. 216666-U)

- · Heads can be changed easily
- · Can be locked using 2 extractable pins
- . With the new HAUPA battery item no. 215523 and charger item no. 215527
- · Pressing load kN: 60
- · Working pressure in bar: 700

With the different colours of the sensor LED, it shows whether the pressing has been completed successfully or which errors have occurred:

- Light is green: Pressing completed as standard, motor stopped.
- Light is orange: Battery voltage not sufficient
- Light is red: Pressing interrupted before completed

The device also has 1 white LED designed to illuminate the working area.







60 kΝ













HAUPA batteries are compatible with the MAKITA charging technology and can be used in all 18 V Li-ion systems.

Art. no. 216760-1

Base Tool

incl. battery and charger in case



Art. no. 216760-1-N

Base Tool

Machine in transport packaging



Art. no. 216760-1-NO

Base Tool

without battery, without charger





Crimping headstock U-KO-6



Pressing head for interchangeable pressing applications, with quick opening, without inserts.

- · Pressing force in kN: 60 kN
- · Head can be opened
- · Opening / Hub: 17 mm
- · Pressing width: slim
- Cable lugs: standard Cu 6 300 mm² / DIN Cu 6 - 300 mm² / DIN Al 16 - 300 mm²
- Connectors: standard Cu 6 300 mm² / DIN Cu 6 - 300 mm² / DIN AI 16 - 300 mm²



Art. no. 216761

for 216760-1



Crimping headstock U-KDE240-6

Pressing head with quick opening, indent v-shape pressing, no inserts required.

- Pressing force in kN: 60 kN Head can be opened
- · Crimp ring terminals without insulation DIN 46234, 10 - 240 mm²
- Cable lugs: standard Cu 10 240 mm² / DIN AI 50 - 240 mm²
- Connectors: standard Cu 10 240 mm² / DIN AI 50 - 240 mm²



Art. no. 216763

for 216760-1



Crimping headstock U-KD300-6

Pressing head 4-mandrel U-KD300-6 for exchange head system US-6M (216760-1), insert does not need to be changed, mandrel pressing.

- . Pressing force in kN: 60 kN
- Cable lugs: standard Cu 16 300 mm²
- · Connectors: standard Cu 16 120 mm2



Art. no. 216665-U

for 216760-1













Crimping headstock U-HKD400-6

Pressing head 4-mandrel U-HKD400-6 for exchange head system US-6M (216760-1), insert does not need to be changed, mandrel pressing.

- · Pressing force in kN: 60 kN
- · Head can be opened
- Cable lugs: standard Cu 25 400 mm²
- Connectors: standard Cu 25 400 mm²









Cutting headstock U-KS6-S50

- · for copper and aluminium cable
- · multi-wiring
- · sector-shaped

Ø 50









60 kN

Art. no. 216666-U

for 216760-1



Art. no. 216762

for 216760-1



Punching headstock U-S-6

without inserts, 1 connecting rod 3/8-24 UNF (article no. 217660), 1 connecting rod 3/4-16 UNF (article no. 217662), 1 adapter (article no. 217664), 1 spacer bushing (article no. 217666).

Advantages:

- · Head can be rotated by 360°
- · Flexible aluminium head

Stamping capacity:

- . for steel plate up to max. thickness of 3.2 mm
- . for stainless steel up to max. thickness of 1.6 mm
- from Ø 12 mm to max. 50 mm punching die

60 kN



Art. no. 216764

for 216760-1



Universal set 1

Sensor

Hydraulics for interchangeable pressing tools, crimping head can be rotated by 180°, with fast opening, manual return flow after perfect pressure.

Consists of Art. 216760-1, Art. 216763 and Art. 216762 in one SysCon system container, incl. insert.

- · Heads can be changed easily
- · Can be locked using 2 extractable pins
- · With the new HAUPA battery item no. 215523 and charger item no. 215527
- . Pressing load kN: 60
- Working pressure in bar: 700





Universal set 2

Hydraulics for interchangeable pressing tools, crimping head can be rotated by 180°, with fast opening, manual return flow after perfect pressure.

Consists of Art. 216760-1. Art. 216761 and Art. 216762 in one SysCon system container incl. insert.

- · Heads can be changed easily
- · Can be locked using 2 extractable pins
- · With the new HAUPA battery item no. 215523 and charger item no. 215527
- · Pressing load kN: 60





3 pieces




















Smart Battery powered crimping tool **S0-6**

Hydraulic for interchangeable dies, crimping head 180° swivelling, Head can be opened, manual return flow after perfect pressure.

Extent of supply:

- 1 crimping tool,
- 1 charger,
- 1 battery,
- 1 strap, in SysCon stacking box SysCon M art. 220372 without inserts

Technical data:

- · Pressing force in kN: 60
- Working pressure in bar: 700
- · Head can be opened yes
- · Opening/ Hub: 17 mm
- · Pressing width: slim
- · Pressing time, battery-operated in seconds: ca. 5
- · Battery charging time in minutes: 30
- · Battery type: Li-lon, 18 V, 2 Ah
- <u>Cable lugs:</u> standard Cu 6-300 DIN Cu 6-300 • DIN AI 16-300
- Connectors: Cu 6-300
 DIN Cu 6-300 DIN Al 16-300
- Dimensions: 383 x 75 mm
- · Weight in kg: 3,0
- · Weight of set in kg: 7,1



6-300 standard cu	6-300 DIN CU	16-300 DIN AL	6-300 standard cu	6-300 DIN CU	16-300 DIN AL
-------------------------	-----------------	------------------	-------------------------	-----------------	------------------



700 bar









HAUPA batteries are compatible with the MAKITA charging technology and can be used in all 18 V Li-ion systems.

Art. no. 216801-1

Base Tool

incl. battery and charger in case



Art. no. 216801-1-N

Base Tool

Machine in transport packaging



Art. no. 216801-1-NO

Base Tool

without battery, without charger







Crimping dies set Standard Cu

13 standard crimping dies in practical transport case







Art. no.	mm ²	PW		PU
216806	6	5	Cu	1 pair
216808	10	5	Cu	1 pair
216810	16	5	Cu	1 pair
216812	25	5	Cu	1 pair
216814	35	5	Cu	1 pair
216816	50	5	Cu	1 pair
216818	70	5	Cu	1 pair
216820	95	5	Cu	1 pair
216822	120	5	Cu	1 pair
216824	150	5	Cu	1 pair
216826	185	5	Cu	1 pair
216828	240	5	Cu	1 pair
216830	300	5	Cu	1 pair

Art. no. 216805-SET

Set: 14-pieces, 6 - 300 mm²





Crimping dies set DIN Cu

12 DIN-Crimping diesin practical transport case









Art. no.	mm ²	PW	ld.		PU
216834	10	5	6	Cu	1 pair
216836	16	5	8	Cu	1 pair
216838	25	5	10	Cu	1 pair
216840	35	5	12	Cu	1 pair
216842	50	5	14	Cu	1 pair
216844	70	5	16	Cu	1 pair
216846	95	5	18	Cu	1 pair
216848	120	5	20	Cu	1 pair
216850	150	5	22	Cu	1 pair
216852	185	5	25	Cu	1 pair
216854	240	5	28	Cu	1 pair
216856	300	5	32	Cu	1 pair



Art. no. 216831-SET

Set: 13-pieces, 10 - 300 mm²













Dies for terminals and compacted connectors for standard tube terminals and compacted connectors, also for

thinned, compacted conductors, in practical transport case

Art. no. 216806/V-SET

Set: 14-pieces, 6 - 300 mm²





300-06

4)	1
	1	Y	1	1

Art. no.	mm ²	PW		PU
216806/V	6	5	Cu	1 pair
216808/V	10	5	Cu	1 pair
216810/V	16	5	Cu	1 pair
216812/V	25	5	Cu	1 pair
216814/V	35	5	Cu	1 pair
216816/V	50	5	Cu	1 pair
216818/V	70	5	Cu	1 pair
216820/V	95	5	Cu	1 pair
216822/V	120	5	Cu	1 pair
216824/V	150	5	Cu	1 pair
216826/V	185	5	Cu	1 pair
216828/V	240	5	Cu	1 pair
216830/V	300	5	Cu	1 pair



Cable pulling device FOX

Cable pulling device FOX with glass fibre rod Ø 4.5 mm and green PP coating RAL 6018, with zinced steel winder Ø 330 mm, standing version, complete with front/end sleeve M5 and pulling head M5 with loop



Art. no. 143050

TL: 40 m, Ø 4,5 mm




Art. no. 143052

TL: 60 m, Ø 4,5 mm



Art. no. 143054

TL: 80 m, Ø 4,5 mm



Cable pulling device **HAUPA PullTec**

with special plastic coating, M5 thread and probe, in durable plastic housing, colour: black

Single Composite

4,0 mm, green

. Breaking load: 300 kg



The advantages of the HAUPA PullTec at a glance:

- · Material: Coated with a special plastic
- · Slides very well and is highly elastic
- · Low friction
- · Does not break or bend
- · M5 thread
- · With probe
- · In durable plastic housing



TL: 20 m. Ø 4.0 mm

Art. no. 143500

Art. no. 143502

TL: 30 m, Ø 4,0 mm



Cable pulling device **HAUPA PullTec**

with special plastic coating, M5 thread and probe, in durable plastic housing, colour: black

Single Composite

■ 5,2 mm, black

· Breaking load: 350 kg







does not break or bend



Breaking strength: 350 kg



TL: 30 m. Ø 5.2 mm





haupa.com









Decoiler 1200

The front and the rear sides are made of anodized aluminum with antiskid ribs. For the left and the right side, sink steel with powder coating has been used. Because of this construction, the decoilers are strong, flexible to use, and resistant against heavy circumstances. The roles have bearings and a sliding axis, which make it easy to change the position of the roles without any special tools. Four antiskid buffers ensure that vibrations are subdued and floors remain intact.

Technical data:

Length: 610 mm Width: 570 mm Height: 115 mm

Drum/width: 560 mm Drum-Ø: 1200 mm Drum/kg: 175



Art. no. 143400

Weight: 9 kg

Decoiler 1200+

The front and the rear sides are made of anodized aluminum with antiskid ribs. For the left and the right side, sink steel with powder coating has been used. Because of this construction, the decoilers are strong, flexible to use, and resistant against heavy circumstances. The roles have bearings and a sliding axis, which make it easy to change the position of the roles without any special tools. Four antiskid buffers ensure that vibrations are subdued and floors remain intact.

Technical data:

Length: 705 mm Width: 670 mm Height: 115 mm

Drum/width: 660 mm Drum-Ø: 1200 mm Drum/kg: 300

Art. no. 143402

Weight: 10,5 kg



VarioPro 1000 V replaceable blade system

Art. no. 102052

30-pieces

The VarioPro replaceable blade system with insulated replaceable blades, switching cabinet key is integrated into the system, VDE pliers set and voltage tester.

Content: 30 pcs.

- Slot: 0.4 x 2.5 x 100, 0.5 x 3.0 x 100, 0.6 x 3.5 x 100, 0.8 x 4.0 x 100, 1.0 x 5.5 x 100, 1.2 x 6.5 x 100
- Phillips: 0 x 100, 1 x 100, 2 x 100
- Pozidriv: 0 x 100, 1 x 100, 2 x 100
- PZ/FL 1, PZ/FL 2
- Tx: 8 x 100, 9 x 100, 10 x 100, 15 x 100, 20 x 100, 25 x 100, 30 x 100
- Square: 8 x 47
- Double-bit: 5.3 x 47
- Screw cap, additional screw cap when using as precision tool (electronics)
- · 2-component exchangeable handle: 120 mm
- Voltage testers VDE/GS: 100700, 125-250 V
- VDE 2C pliers: 211200*,

211204*.

211208*

211214





High leverage | perfected cutting force performance (high leverage pliers offer power saving of up to 50%)



★ 1000 V IEC 60900






























haupa.com









VarioPro 1000 V replaceable blade system + TQ-Handle

The VarioPro replaceable blade system with insulated replaceable blades, switching cabinet key is integrated into the system, plus VDE pliers set. Including a TQ-Handle (Art. no. 102790, 1 - 6 Nm) and Square socket key.

Content: 31 pcs.

- Slot: 0.4 x 2.5 x 100, 0.5 x 3.0 x 100, 0.6 x 3.5 x 100, 0.8 x 4.0 x 100, 1.0 x 5.5 x 100, 1.2 x 6.5 x 100
- Phillips: 0 x 100, 1 x 100, 2 x 100
- Pozidriv: 0 x 100, 1 x 100, 2 x 100
- PZ/FL 1, PZ/FL 2
- Tx: 8 x 100, 9 x 100, 10 x 100, 15 x 100, 20 x 100, 25 x 100, 30 x 100
- Square: 8 x 47
- Double-bit: 5.3 x 47
- · Screw cap, additional screw cap when using as precision tool (electronics)
- · 2-component exchangeable handle: 120 mm
- · 2-component exchangeable torque handle: 120 mm
- · Square socket key
- VDE 2C pliers: 211200*.

211204*.





Including torque handle!

















31-pieces







HAUPA Vario 1000 V replaceable blade system

Art. no. 102000-1


Phillips, 10-pieces



Art. no. 102000/PZ-1

Pozidriv, 10-pieces





- · High level of safety
- · Exchangeable cap for use as an electronics screwdriver

in robust nylon bag, Contents: 2C exchangeable handle, screw cap, replaceable blade - slotted blade 0.4 x 2.5 / 0.5 x 3.0 / 0.8 x 4.0 / PH1 / PH2 or PZ1 / PZ2, PZ/FL 2, switch cabinet key - square 1,

- · Switching cabinet key is integrated into the system
- · Space-saving

double-bit

- · Weight-saving
- · Cost-effective price/performance ratio
- · Meets all relevant standards

















VarioTQ dynamometric screwdriver with replaceable blades

Vario**TQ**

insulated replaceable blade made from molybdenum vanadium steel, hardened, blasted, with hexagonal shaft, in robust nylon bag.

- · torque can be set using a separate key
- · scale value can easily be read off
- clearly perceptible and audible signal when the set torque is achieved
- · torque accuracy according to EN ISO 6789:2003

Contents: 12-pieces

- 2-component exchangeable handle (1000 V)
 - 1 6 Nm or 0,5 3,5 Nm
- slotted 0.4 x 2.5 / 0.5 x 3.0 / 0.8 x 4.0 / 1.0 x 5.5 / 1.2 x 6.5
- PH0 / PH1 / PH2 or PZ0 / PZ1 / PZ2
- PZ/FL 1
- PZ/FL 2
- · Square socket key





Art. no. 102700-1

Phillips, 1 - 6 Nm



Art. no. 102700/PZ-1

Pozidriv, 1 - 6 Nm



Art. no. 102701-1

Phillips, **0,5 - 3,5 Nm**



Art. no. 102701/PZ-1

Pozidriv, **0,5 - 3,5 Nm**





Tool case 1000 V, 1/4"

made of plastic, complete with 1/4" tools. The plastic material used for socket sets is guaranteed to pass -40°c impact tests. This quarantee that the insulation value will not be compromised due to impact. Dimension: 286 x 255 x 54 mm.

Contents:

- · Reversible ratchet 150 mm, 1/4"
- T-slip-on-keys 125 mm, 1/4"
- Extension 100 and 150 mm. 1/4"
- Sockets 1/4", 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- Dies for hexagon srews 1/4", 3, 4, 5, 6 mm





Tool case 1000 V, 1/2"

made of plastic, complete with 1/2" tools. The plastic material used for socket sets is guaranteed to pass -40°c impact tests. This quarantee that the insulation value will not be compromised due to impact. Dimension: 380 x 316 x 61 mm.

Contents:

- Reversible ratchet 250 mm, 1/2"
- T-slip-on-keys 200 mm, 1/2"
- Extension 125 and 250 mm, 1/2"
- Sockets 1/2", 10, 11, 12, 13, 14, 17, 19, 22, 24, 27, 32 mm
- Dies for hexagon srews 1/2", 4, 5, 6, 8, 10 mm







Art. no. 220576



Art. no. 220404

20-pieces











Tool case 1000 V, 3/8"

made of plastic, complete with 3/8" tools. The plastic material used for socket sets is guaranteed to pass -40°c impact tests. This quarantee that the insulation value will not be compromised due to impact. Dimension: 286 x 255 x 54 mm.

Contents:

- Reversible ratchet 200 mm, 3/8"
- T-slip-on-keys 200 mm, 3/8"
- Extension 150 and 250 mm, 3/8"
- · Sockets 3/8", 8, 10, 12, 13, 14, 17, 19, 22 mm
- Dies for hexagon srews 3/8", 4, 5, 6, 8 mm






Torque wrench 1000 V

Art. no. 220415

Art. no. 220402

16-pieces

10 - 50 Nm



















Security lock | Shackle Ø 4.7 mm

Zenex padlock

- · Locking system with differently locking locks
- Contents: 1 key (1 operator = 1 padlock = 1 key)
- · Spark-free padlock suitable for use in explosive atmospheres
- · Non-magnetic
- Body made of thermoplastic composite material resistant to corrosion, UV exposure, temperatures from -40°C to +90°C
- · Includes writeable labels with Danger / Property of in EN, FR, and SP

Art. no. 120155

Ø 4.76 | 35 x 86 mm





Security lock | Shackle Ø 6 mm

Zenex padlock

- · Locking system with differently locking locks
- Contents: 1 key (1 operator = 1 padlock = 1 key)
- Key retention ensures that the lock doesn't unintentionally remain unlocked
- Spark-free padlock suitable for use in explosive atmospheres
- · Non-magnetic
- · Body made of thermoplastic composite material resistant to corrosion, UV exposure, temperatures from -40°C to +90°C and chemicals
- · Includes writeable labels with Danger / Property of in EN, FR, and SP

Art. no. 120156

Ø 6 | 38 x 82 mm





Aluminium lockout hasp

Safety lockout hasp, aluminium, clip with diameter 2.71 cm, red handle, for 6 padlocks with max. 6 mm shackle diameter

- Safety lockout for an effective multi-person lockout
- In the event of maintenance/repair, the system remains inoperable until the last lock has been removed

Art. no. 120157

Ø 6 | for 6 locks




















Plastic lockout hasp

Non-conductive nylon lockout hasp, dielectric protection, spark-free - for 6 padlocks with a maximum shackle diameter of 6 mm

- · Safety lockout for an effective multi-person lockout
- In the event of maintenance/repair, the system remains inoperable until the last lock has been removed
- · Suitable for use in potentially explosive atmospheres

Art. no. 120158 Ø 6 | for 6 locks NEW

0 0

Safety lockout for circuit breaker

Universal lock for mini circuit breakers

- · Quick and easy installation, no tools necessary
- Padlock can be installed horizontally or vertically to suit all applications
- · Suitable for use in potentially explosive atmospheres



 \emptyset 6 | for 2 locks



.





Safety lockout for standard circuit breakers

Designed for standard circuit breakers

- · Effective lockout of circuit breakers
- Durable construction with powder-coated, reinforced polymer for use in extreme environmental conditions
- · Suitable for use in potentially explosive atmospheres



Lockout device for 120 - 240 V plug

Cover for electrical plug connection, small - 120 to 240 V plug connections

- · Unique rotating design for easy handling
- · Installation for applications in tight spaces
- · Durable, lightweight, dielectric Zenex body is resistant to chemicals



Lockout device for 16 - 32 A CEE plug

Cover for electrical plug connection, large - 240 and 550 V

- · Unique rotating design for easy handling
- · Installation for applications in tight spaces
- · Durable, lightweight, dielectric Zenex body is resistant to chemicals

Adjustable multi-lock cable

Adjustable cable lockout (1.8 m) for various security lockout applications

- Adjustable cable length (braided steel cable 1.8 m x Ø 4 mm with plastic coating)
- Thermoplastic Zenex body is chemical resistant
- · Flexible and easy insertion into various lockout points
- · Integrated safety hasp for up to 4 padlocks with a max, shackle diameter of 6 mm
- Ideal for multiple lockout situations
- · Comes with reusable, writeable safety labels (EN, FR, SP)
- · Suitable for use in potentially explosive atmospheres



120 - 240 V







Art. no. 120172

240 and 550 V







Art. no. 120173

Ø 6 | 1,8 m x Ø 4 mm











haupa.com







Security lockout set

Set of lockout devices for electrical systems - Blister-pack -**English**

Content:

- · 1 keyed-alike Zenex padlocks
- · 1 mini circuit breaker lockouts
- 1 circuit breaker lockout for large circuit breakers
- · 2 Warning tags/signs
- · 1 plastic lockout hasp for four padlocks
- · 1 compact red belt pouch



Do not operate sign | English

Lockout tags in English

(each bag contains 12 tags) Danger - Do not operate

Do not operate sign | German

Lockout tags in German

(each bag contains 12 tags) Gefahr - nicht bedienen

Do not operate sign | Spanish

Lockout tags in Spanish

(each bag contains 12 tags) Peligro - no hacer funcionar

Art. no. 120175

146 x 80 mm

Art. no. 120176

146 x 80 mm

NEW



NEW 146 x 80 mm



Set with 7 tools



7-pieces

Screwdrivers set 1000 V, Phillips, 6 pieces

Content: Electricians' screwdriver 1000 V, 2.5 x 75 mm / 4 x 100 mm / 5.5 x 125 mm / 6.5 x 150 mm, Cross slotted screwdrivers 1000 V, Phillips size 1 and 2

Automatic wire stripper

- · for solid and flexible cables
- · automatic setting to the cross-section
- Working range of 0.5 to 6 mm² (212695)
- integrated side cutter up to 2.5 mm²



















Hexagon angle screwdriver set, with spherical head

Made from chrome vanadium steel, blades hardened throughout, nickel plated, **extra long**, metric or AF, with spherical head, in folding holder.

Content metric:

WS: Hex 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10

Content AF:

WS: Hex 1/16 - 5/64 - 3/32 - 1/8 - 5/32 - 3/16 - 1/4 - 5/16 - 3/8"

Art. no. 100965

9-pieces, size 1,5 - 10 mm



Art. no. 100967

9-pieces, size 1/16" - 3/8"











Hole saw with edge countersink and board ejector

- · For setting wall-flush sockets, Ø 68 mm
- · Cutting depth 35 mm
- · High concentricity
- Specially for plasterboard, softwood, plywood, Fermacell etc.
- 9,5 mm hexagonal holder
- In plastic box



Ø 68 mm















Ratchet screwdriver set **FlexBag**

FlexBas

with 50 mm S2 bits and reduced shank, in robust nylon bag.

Ratchet screwdriver with right/left hand motion. Adjustable operating angle of 180°. Safety and special bit set - top quality S2! The screwing grasp also Quick change penholder and 2-components Handle provides for anti-slip and fatiguefree working. The ergonomic form and the soft zones within the pressure area range make a relaxed possible screws.

Contents:

1/4" 50 mm Power bits Tx:

T5, T6, T7, T8, T9, T10, T15, T20, T25, T30, T40

1/4" 50 mm Power bits Hex: H2, H2.5, H3, H4, H5, H6

1/4" 50 mm Power bits PH: 0, 1, 2, 3

1/4" 50 mm Power bits PZ: 0, 1, 2, 3

1/4" 50 mm Power bits slot: 3, 4, 5, 6, 7, 8

1/4" 50 mm Power bits SQ: 0, 1, 2, 3

1/4" 50 mm Power bits Tri-Wing: 1, 2, 3

1/4" 50 mm Power bits PZ/FL 1 & 2

Above bits are in reduced shank except T40, H6,

flat: 6, 7, 8 in full hex shank

2 pcs. Adapters: 1/4" 50 mm, 1/4" 80 mm 8 pcs. sockets: 5, 5.5, 6, 7, 8, 10, 12, 13

1 pc of FlexPlus ratcheting driver





















Art. no. 104020-1

51-pieces, Bit: 50 mm















Ratchet screwdriver set **FlexBagPro**

FlexBas

37 safety bits, 8 spanner sockets, 5 drill bits, in robust nylon bag.

Ratchet screwdriver with right/left hand motion. Adjustable operating angle of 180°. Safety and special bit set - top quality S2! The screwing grasp also Quick change penholder and 2-components Handle provides for anti-slip and fatiguefree working. The ergonomic form and the soft zones within the pressure area range make a relaxed possible screws.

Contents:

1/4" 50 mm torsion bits S-TX (hole), color coded: T10, T10, T15, T15, T20, T25, T27, T30, T40

1/4" 50 mm torsion bits Hex, color coded: H3, H4, H5, H6

1/4" 50 mm torsion bits PH, color coded: 1, 2, 2, 3

1/4" 50 mm torsion bits PZ, color coded: 1, 2, 2, 2

1/4" 50 mm torsion bits slot, color coded: 3, 4, 4, 5, 6

1/4" 50 mm torsion bits SQ, color coded: 1, 2, 3

1/4" 50 mm standard bits PZ/FL: 1, 1, 2, 2

1/4" 50 mm standard bits PH/FL: 1, 1, 2, 2

8 pcs. sockets: 5, 5.5, 6, 7, 8, 10, 12, 13

5 pcs. drills: 2, 3, 4, 5, 6

1 pc of FlexPlus ratcheting driver

















Art. no. 104022-1

51-pieces. Bit: 50 mm





with colour coding



incl. Drill Bits



Socket set

1/4"

Art. no. 110674

33-pieces, 1/4"

Chrome vanadium steel, industrial quality, black plastic case with metal catch.

Contents: 1/4"

12 Sockets: 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 mm,

- 1 ratchet handle,
- 2 gears with quick release function,
- 1 flexible extension bar,
- 2 extension bars 50 & 100 mm.
- 1 universal joint,
- 1 sliding adapter 3/8" x 1/4" for extension bar work as T handle,
- 1 spinner handle for screwdriver
- 14 insert bit socket PH: 1 2 3,

HX: 3 - 4 - 5 - 6 - 8,

TX: 10 - 15 - 20 - 25 - 27 - 30















SocketFlex socket wrench box

1/4" 1/2"

Chrome vanadium steel, industrial quality, black plastic case with metal catch.

Contents:

12 1/4" socket wrench inserts 4 - 4,5 - 5 - 5,5 - 6 -

7 - 8 - 9 - 10 - 11 - 12 - 13 mm

2 1/4" 50 and 150 mm extensions

1 3/8" x 1/4" adapter for extending for use as a T-handle

1 1/4" universal joint

1 bit adapter 4-edge to 1/4" hexagonal

1 1/4" reversible wratchet

13 1/2" socket wrench inserts 10 - 11 - 12 - 13 - 14 -

15 - 17 - 19 - 22 - 24 - 27 - 30 - 32 mm

2 1/2" 75 and 250 mm extensions

1 3/8" x 1/2" adapter for extending for use as a T-handle

1 1/2" universal joint

1 1/2" reversible ratchet

1 Flex ratchet screwdriver

1 adapter 1/4" x 1/4" x 50 mm

1 adapter 1/4" x 1/4" x 80 mm

4 bits 1/4", 50 mm, PH 0 - 1 - 2 - 3

4 bits 1/4", 50 mm, PZ 0 - 1 - 2 - 3

2 bits 1/4", 50 mm, PZ/FL 1 - 2

4 bits 1/4", 50 mm, slot 3 - 4 - 5 - 6 mm

6 bits 1/4", 50 mm, hexagon socket 2-2,5-3-4-5-6

Art. no. 110672

59-pieces, 1/4" + 1/2"











Torque wrench





5 - 25 Nm, 1/4"





- Measuring range from 5 25 Nm
- Drive 1/4"
- · With viewing window display and locking mechanism
- · Easy to read scale
- · In impact-proof storage box









Torque wrench






Art. no. 110609

42 - 210 Nm, 1/2"

20 - 120 Nm, 1/2"



- · Material: Chrome-Vanadium steel DIN-3122; ISO 6789
- Measuring range from 20 120 Nm
- Drive 1/2"
- · With viewing window display and locking mechanism
- · Easy to read scale
- · In impact-proof storage box










Torque wrench







- · Material: Chrome-Vanadium steel DIN-3122; ISO 6789
- · Measuring range from 42 210 Nm
- Drive 1/2"
- · With viewing window display and locking mechanism
- · Easy to read scale
- · In impact-proof storage box













haupa.com





Utility knife professional HUPblackSeries9

- · Extremely sharp cutting edge for precise cuts
- · Blade length: 80 mm
- · Blade width: 9 mm
- Blade thickness: 0.38 mm
- 13 segments
- · Double grinding for maximum sharpness
- · Ideally suited for a wide range of materials
- · Maximum durability due to fire hardening
- · Black blade coating







Art. no. 200220

145 mm

Blade dispenser HUPblades9

suitable for Art. No. 200220

- · 10 blade strips
- · extremely sharp cutting edge for precise cuts
- · blade length: 80 mm
- · blade width: 9 mm
- · blade thickness: 0.38 mm
- · 13 segments
- · double grinding for maximum sharpness
- ideally suited for a wide range of materials
- · maximum durability due to fire hardening
- · blade black coated







Art. no. 200221

80 x 9 x 0.38 mm











hallpa





Utility knife professional HUPblackSeries18

- · Extremely sharp cutting edge for precise cuts
- · Blade length: 100 mm
- . Blade width: 18 mm
- · Blade thickness: 0.6 mm
- · 8 segments
- · Double grinding for maximum sharpness
- · Ideally suited for various materials
- · Maximum durability due to fire hardening
- · Black blade coating
- · Blade feed with automatic locking device





Art. no. 200222

167 mm





Blade dispenser HUPblades18

suitable for Art. No. 200222

- · 10 blade strips
- · extremely sharp cutting edge for precise cuts
- · blade length: 100 mm
- · blade width: 18 mm
- · blade thickness: 0.6 mm
- · 8 segments
- · double grinding for maximum sharpness
- · ideally suited for various materials
- · maximum durability due to fire hardening
- · blade black coated



0





80 x 9 x 0.38 mm















LED flashlight, HUPflash1000

- · Rechargeable
- Dimmable
- · Zoom function

This flashlight is your compact partner for any application where professional lighting is needed.

The flashlight features Twist-Focus technology, allowing you to adjust the light beam by twisting the head. The button enables dimming from 100%, to 50%, and 25%. Enjoy flicker-free, cool white light that reaches up to 100 meters.

Waterproof (IPX7) and powered by a rechargeable lithium-ion battery via a supplied USB cable (USB-C). The battery is a standard commercial cell (18650) and can be easily replaced.

1000 Lm	↑ 			Lifetime 50000 h
CRI 90	6500 K	60°	IPX7	zoom
Class III	3.7V 2200mAh 8.14Wh	⊙ 3 - 12h	-10°C ~ 40°C	100 % 50 % 25 %

haupa' CRI 90

NEW

Art. no. 130384

Ø 35 x 152 mm

LED flashlight, HUPflash300

- Splashwater protected
- Dimmable
- · Zoom function

This flashlight is your compact partner for any application where professional lighting is needed.

The flashlight features Twist-Focus technology, allowing you to adjust the light beam by twisting the head. The button enables dimming from 100%, to 50%, and 25%. Enjoy flicker-free, cold white light that reaches up to 100 meters.


The flashlight is splash-proof and powered by three AAA batteries (not included).

300 Lm	↑ ← 034 ← 124mm →	kg 102 g	Lifetime 50000 h	zoom
CRI 90	6500 K	Class III	(120°	IPX4
3X AAA not ioncluded	⊙ 1 - 10h	100 % 50 % 25 %	-10°C ~ 60°C	



LED Pen Torch

- · Illumination range: 50 m
- 50 Lm
- LED 1 Watt CREE
- · With clip
- · 2xAAA batteries



Art. no. 130328

TL: 14 x 143 mm



LED flashlight, HUPflash120

- · Compact pin form
- · With magnetic holding clip
- · Main and inspection light

Perfect for both industrial and trade applications. The rechargeable penlight has two light sources: at the head and on the side. The penlight comes with a USB-C charging cable. Each penlight is equipped with a magnetic clip, allowing you to

easily attach the lamp to any magnetic surface. The flexible use combined with the compact size makes this penlight very practical for professional use by mechanics, craftsmen, technicians, and others.



Art. no. 130388

159 x 18 x 16 mm















LED flashlight, HUPflash800

- · Streamlined and compact design
- · Strong magnets
- Versatile

Our mini flashlight, specially designed to meet your lighting needs, features three different modes: High mode 500 lumen, Low mode 100 lumen, and Top-LED mode for 150 lumen, as well as the Boost mode: Unleashes a powerful 800 lumen boost by pressing and holding the button (3s).

With its sleek, compact design, aluminium housing, and features such as a base and a clip magnet, it effortlessly adapts to your needs and is ideal for use in industrial and trade applications.

The reliable battery lasts approximately 1.5 hours, eliminating the need for frequent recharging or battery replacement.

Experience simplicity through one-button functionality and efficient charging, ensuring your mini flashlight is always ready for the next job.

Art. no. 130382

97 x 30,5 x 21 mm









Magnetic







LED headlamp HUPflash155

- 3 W COB LED
- · Material: ABS, PC
- · Luminosity 155 Lm
- · Colour reproduction 90 CRI
- Battery-powered (3 x AAA included in the scope of delivery)
- Variable light intensity, 50% | 100%
- · Operating time:
 - approx. 2.5 hours at 100% light intensity
 - approx. 4 hours at 50% light intensity
- · Very easy-to-balance headlamp
- · Automatically switches on and off, thanks to special sensor technology
- · Easy to operate e.g. when wearing protective gloves
- · Headband with silicone strips for secure fastening to work helmets
- Dimensions: 60 x 45 x 38 mm
- Weight: 49 g (without batteries)

LED 3W	60 x ← 45 x 38 mm	155 Lm	Lifetime 30000 h	ABS PC	kg 90 g
2,5 h	3xAAA		Sensor.	CRI 90	50 100



Art. no. 130321

TL: 60 x 45 x 38 mm

Art. no. 130319

TL: 60 x 45 x 38 mm

LED headlamp HUPflash155+

- 3.7 V 1200 mAh lithium polymer battery
- 3 W COB LED
- · Material: ABS, PC
- · Light intensity 155 Lm
- · Colour reproduction 90 CRI
- Variable light intensity, 50% | 100%
- · Operating time:
 - approx. 2.5 hours at 100% light intensity
 - approx. 4 hours at 50% light intensity
- . Charging cable (micro USB) included in the scope of delivery
- · Charging time approx. 4 hours
- · Very easy-to-balance headlamp
- · Automatically switches on and off, thanks to special sensor technology
- · Easy to operate e.g. when wearing protective gloves
- · Headband with silicone strips for secure fastening to work helmets
- Dimensions: 60 x 45 x 38 mm
 Weight: 73 g

3W	60 x 45 x 38 mm ▼	155 Lm	30000 h	Polymer Akku 1200 mAh 3,7 V	kg 73 g
2,5h	ABS PC		Sensor	CRI 90	50 100













LED inspection lamp HUPlight400

- . White SMD main LED with 400 Lumens on the front side
- Secondary rear 200 Lumens white SMD-LED
- Additional upper spot 120 Lumens white SMD-LED
- · Extremely rugged design made of nylon and aluminium
- · 200° vertically foldable head with super-strong magnetic base
- · Loop and hanging system for easy use
- · Two strong magnets on the back of the lamp
- · IK07 super rugged, impact resistant design
- · Large reflector SMD LED
- . 5 V charging system for charging the battery
- Integrated USB-C charging port with protective cover
- · 1 A direct USB-C charging 2 hours charging time
- . 1 m USB-C charging cable included

Specifications:

- · Lithium 3.7 V, 800 mAh, rechargeable
- LED: Front side main 3 W, SMD LED 400 Lm, CRI 90 Back side 1.5 W, SMD LED 200 Lm, CRI 90 Spot 1 W, SMD LED, 120 Lm, CRI 90
- Ambient temperature: -10°C +45°C
- Operating time: 3 h to 6 h for main LED in front

6 h for rear LED

6 h for spot LED

- Dim switch for the front main LED: 100% 50%
- · Charging time: approx. 2.5 h
- · Protection class: III
- USB-C input for charging: 5 V, 1000 mA
- Lamp dimensions: 160 x 37 x 21 mm
- . Net weight: 90 g (not including packaging)





Mini working light HUPlight4


- Rechargeable battery, lithium-ion 1800 mAH 3.7 V
- · 4 watt LED
- Approximately 200 Lumen lighting performance
- · Approximately 3 hours lighting performance
- · Lamp may be charged using the micro USB port
- · Stand may be angled
- · Dual magnetic bracket
- · Hook for securing and hanging
- · Can be used and carried everywhere

LED 4W	120 x ← 60 x 25 mm	200 Lm	Lifetime 30000 h	Akku Li-Ion 1800 mAh 3,7 V	
ABS	(P54)	- 100-240 V AC = 12-24 V DC	A	2	3h 3



LED working light HUPlight10+3

- · Integrated Li-Ion 3.7V / 6.7Ah battery
- 10 watt + 3 watt LED
- · High-quality plastic housing
- . For use inside and out, splashproof according to IP54
- · Extremely bright illumination, 7000K colour temperature
- 220 Lm (3W LED) + 800 Lm (10W LED) luminosity
- Colour rendering 90 CRI (Colour Rendering Index)
- Variable light output, 50% | 100%
- · Operating time
 - 10W LED: Approx. 3 hours with 100% light output
 - Approx. 6 hours with 50% light output
 - 3W LED: Approx. 12 hours with 100% light output
 - Approx. 24 hours with 50% light output
- · 3.5 hours charging time using power unit supplied
- Charger: 100 240 V AC plug-in power supply (5V/2A DC)
- · 12V KFZ charging cable
- · Adjustable magnetic stand
- · With hook for hanging



Art. no. 130348

10 watt + 3 watt LED













LED charging station HUPlightWLcharger

- · Charges two devices simultaneously
- · Works with compatible mobile phones
- · IK08 impact resistance
- Strong magnets on back side enable easy mounting on magnetic surfaces and integrated screw holes for permanent mounting

Specifications:

- Material: ultra-hard nylon, aluminium, rubber, PC and TPE
- Power adapter: Input: 100 240 V~
 50/60 Hz, 0.8 A
 Output: 5 V DC, 3.0 A 20 W max.
 USB charging cable: USB-C to USB-C x 1 m
- When charging with the wireless pad:
 Charge time: approx. 3.0 8.0 hours
 depending on battery pack the
 ambient temperature affects the charge
 and discharge time of the battery
- Operating temperature: -5°C to +30°C
- Charging station dimensions: 265 x 110 x 29 mm
- · Net weight: 330 g (not including packaging)

Contents:

USB power adapter:
 Input: 100 - 240 V~, 50/60 Hz, 0.8 A

Output: 20 W, 5 V DC 3.0 A

. USB charging cable: USB-C to USB-C x 1 m





Art. no. 130376

265 x 110 x 29 mm

NEW









LED work lamp HUPlightWL1000

- · Supports wireless charging (charging station HUPlightWLcharger Art. 130376)
- · Colour reproduction 90 CRI
- · Super bright 1,000 lumens COB-LED
- · Super bright spot LED with 300 lumens
- · Stand with magnetic base rotates 160 degrees
- · Battery status and charging indicators
- Protection class IP65
- · IK08 impact resistance

Specifications:

- Main LED: 10 W COB 1,000 LM; Spot LED: 3 W 300 LM
- · Ultra-hard nylon, aluminium, PC, TPE and Fe
- Battery Li-Ion 3.7 V/2,500 mAh, rechargeable
- Power adapter: Input: 100 240 V~, 50/60 Hz, 0.8 A Output: 5 V DC, 3.0 A, 20 W max.
- . USB charging cable: USB-C to USB-C x 1m
- · Charging time: approx. 2 hours (charging station HUPlightWLcharger approx. 3.5 hours)
- · Operating time: 3 12 hours
- Operating temperature: -5°C to +45°C
- Lamp dimensions: 72 x 40 x 92 mm
- Net weight: 210 g (not including packaging)

Contents:

. USB charging cable: USB-C to USB-C x 1 m

72 x 40 x 92 mm	NEW
OPI	tioner of the second
CRI 90	
	./ /

Art. no. 130374















LED work lamp HUPlightWL900

- Supports wireless charging (charging station HUPlightWLcharger Art. 130376)
- · Colour reproduction 90 CRI
- Super bright 900 lumens COB-LED
- · Head rotates 180 degrees
- Focus function, beam angle 20° to 110°
- · Luminous range: max. 200 m
- · With strong magnetic base
- · Battery status and charging indicators
- Protection class IP54
- · IK08 impact resistance

Specifications:


- LED: 10 W 900 LM
- · Ultra-hard nylon, aluminium, PC, TPE and Fe
- Battery Li-Ion 3.7 V/2,500 mAh, rechargeable
- Power adapter: Input: 100 240 V[~], 50/60 Hz, 0.8 A
 Output: 5 V DC, 3.0 A, 20 W max.
- . USB charging cable: USB-C to USB-C x 1m
- Charging time: approx. 2 hours (charging station HUPlightWLcharger approx. 3.5 hours)
- · Operating time: 3 12 hours
- Operating temperature: -5°C to +45°C
- · Lamp dimensions: 47 x 48 x 192 mm
- Net weight: 270 g (not including packaging)

Contents:

• USB charging cable: USB-C to USB-C x 1 m











LED inspection lamp HUPlightWL1500

- · Supports wireless charging (charging station HUPlightWLcharger Art. 130376)
- · Colour reproduction 90 CRI
- · Super bright 1500 lumens COB-LED lamp
- · Super bright spot LED with 300 lumens
- · Integrated hook lamp/torch can be positioned in a wide range of angles
- · Battery status and charging indicator
- · Powerful magnet on the back for hands-free work
- Protection class IP65
- · IK08 impact resistance

Specifications:

- LED: 15 W COB SUPERWHITE + 3 W LED
- Lumens: main light 15 W, 1,500 Lm; spot LED 3 W, 300 Lm
- · Material: Ultra-robust nylon, aluminium, PC, rubber and TPE
- · Battery Li-lon 3.7 V/4400 mAh, rechargeable
- Power adapter: Input: 100 240 V~, 50/60 Hz, 0.8 A Output:PD 20 W, 5 V DC, 3.0 A, 20 W max.
- . USB charging cable: USB-C to USB-C x 1m
- · Charging time: approx. 3.5 hours (charging station HUPlightWLcharger approx. 6 hours)
- · Operating time: 3.0 14.0 hours
- Operating temperature: -5°C to +45°C
- · Lamp dimensions: 77 x 171 x 41 mm
- · Net weight: 400 g (not including packaging)

Contents:

USB charging cable: USB-C to USB-C x 1 m





Art. no. 130370

77 x 171 x 41 mm

NEW









LED set HUPlightWL1500+1000

Set comprising:

Charging station"HUPlightWLcharger" Art. 130376 LED work lamp "HUPlightWL1000" Art. 130374 LED inspection lamp "HUPlightWL1500" Art. 130370

For technical specifications, see respective item

Art. no. 130371

3 pieces





LED set HUPlightWL900+1000

Set comprising:

Charging station "HUPlightWLcharger" Art. 130376 LED work lamp "HUPlightWL1000" Art. 130374 LED work lamp "HUPlightWL900" Art. 130372

For technical specifications, see respective item

Art. no. 130373

3 pieces







Compact floodlight HUPlight10pro

- Integrated Li-Ion 3.7V / 4.4Ah battery
- 10 watt LED
- · High-quality and solid housing made of diecast aluminium, with plastic edge protector
- For use inside and out, splashproof according to IP54
- · Extremely bright illumination, 6500K colour temperature
- 900 Lm luminosity
- · Colour rendering 90 CRI (Colour Rendering Index)
- Variable light output, 50% | 100%
- · Operating time:
 - Approx. 3 hours with 100% light output
 - Approx. 6 hours with 50% light output
- Approx. 4.75 hours charging time using power unit supplied
- · Can be used to charge external devices via USB (power bank function)
- Charger: 100 240 V AC plug-in power supply (5 V/1A DC)
- · 12V KFZ charging cable
- · Adjustable stand





Compact floodlight HUPlight20pro

- Integrated Li-Ion 7.4V / 4.4Ah battery
- 20 watt LED
- · High-quality and solid housing made of diecast aluminium, with plastic edge protector
- · For use inside and out, splashproof according to IP54
- Extremely bright illumination, 6500K colour temperature
- · 1800 Lm luminosity
- · Colour rendering 90 CRI (Colour Rendering Index)
- Variable light output, 50% | 100%
- · Operating time:
 - Approx. 3 hours with 100% light output
 - Approx. 6 hours with 50% light output
- · 5 hours charging time using power unit supplied
- · Can be used to charge external devices via USB (power bank function)
- Charger: 100 240 V AC plug-in power supply (12 V/1A DC)
- · 12V KFZ charging cable













haupa.com





HAUPA GmbH, Lange Str. 40, D-42857 Remscheid, Germany Phone: +49 (0)2191 8418-0, Fax: +49 (0)2191 8418-840, E-mail: sales@haupa.com Prices upon request. Sales are conducted exclusively through specialized wholesalers. Technical changes and printing errors reserved.

Compact floodlight HUPlight30pro

- Integrated Li-Ion 7.4V / 5.2Ah battery
- · 30 watt LED
- High-quality and solid housing made of diecast aluminium, with plastic edge protector
- · For use inside and out, splashproof according to IP54
- · Extremely bright illumination, 6500K colour temperature
- · 2500 Lm luminosity
- Colour rendering 90 CRI (Colour Rendering Index)
- Variable light output, 50% | 100%
- · Operating time:
 - Approx. 3 hours with 100% light output
 - Approx. 6 hours with 50% light output
- 5 hours charging time using power unit supplied
- Can be used to charge external devices via USB (power bank function)
- Charger: 100 240 V AC plug-in power supply (12 V/1A DC)
- · 12V KFZ charging cable

• Adjus	table sta	2500	Lifetime 30000 h	Akku Li-Ion 5200 mAh 7,4V	- 100-240 V AC = 12-24 V DC	
IP54	• < USB	A	3h =	CRI 90	50 % 100 %	6500K



Art. no. 130352

30 watt LED



HUPlightpro Crashtest



Magnetic lamp holder

- · Holder for affixing working lamps
- Suitable for Item Nos. 130344, 130346, 130352
- · extra strong magnet for flexible mounting







Art. no. 130343

8.5 x 8.5 x 4 cm



haupa

LED construction site lamp HUPlight5200hybrid

- Compatible with 18 V battery systems from Bosch, Makita, Milwaukee, DeWalt, and CAS (Metabo), corresponding adapters included
- 230 V AC or 18 V DC operation with emergency light function
- · Designed and certified for use on construction sites, both indoors and for temporary outdoor use

This versatile hybrid (230 V & battery) work light is specially designed for professional craftsmen, mechanics, and construction workers who are often on the go. It comes equipped with a battery holder suitable for 18 V batteries from HAUPA. Makita. Dewalt. Milwaukee, Bosch (AMP Share), Metabo (CAS).

The corresponding adapters are included, eliminating the need to purchase an additional battery system.

The work light is dimmable in two stages (50%, 25%), has a cool white colour temperature (5,000 K), and a colour rendering index of RA >90. The operating time ranges from 2.5 to 9 hours (based on an 18 V/5 AH battery), depending on the selected light output mode. The opal diffuser reduces glare from the 5,200 lumen strong light source and ensures homogeneous illumination of the workplace.

The housing and front diffuser are made of impact-resistant polycarbonate (IKO8). The light is dust and splashwater protected thanks to the sturdy battery cover (IP54).

This work light is equipped with technology that prevents overheating and deep discharge of the battery.

The batteries must be charged with the manufacturers' charging stations and are not included.

In addition to batteries, the work light can also be powered by the included 5 m long connection cable HO7RN-F 3G 1.5 mm². This work light is equipped with a socket (max. 3000 W), allowing the connection of another light, power tool, or other device,

eliminating the need for additional extension cords.

Safety: In the event of a power outage, this work light automatically switches to battery operation within approximately 0.5 seconds, ensuring you never sit in the dark and minimizing the risk of injuries and damage.

LED 40W DC mode 47W AC mode	↑ 389 x ← 342 x → 140mm ↓	120°	kg 3550 g
5200 Lm	5000 K	-20°C ~ 45°C	Cable holder
IP54	Lifetime 50000 h	BGI @08 K2	3Step DIM 100%-50%-25%
>IK08	CRI 90	Output 5V 2A Powerbank	DC mode 18 to 21 VDC 2.2A AC mode 220-240VAC 50/60Hz 225mA
4 powertool battery adapters included	1 x Socket 3000W max	H07RN-F 1.5MM ² 5m	Class I















Domed luminaire HUPlight50combi

- integrated Li-Ion 7.4 V / 6.6 Ah battery
- 50 watt LED
- · extremely resistant housing made of highly impact-resistant
- · for indoor and outdoor use, protected against splashing water according to IP54
- · Extremely bright illumination, colour temperature 6500 K
- · Brightness 4000 Lm
- · Colour rendering 90 CRI
- Variable light output, 50% | 100%
- · Operating time:
 - Approx. 2 hours with 100% light output
 - Approx. 4 hours with 50% light output
- . Charging time approx 2.5 hours
- 2x earthed sockets: 220 240 V~AC | Max: 3000 W
- · Charging/power source of external / other devices
- Cable: 5 Metre H07RN-F 3G1.5mm²
- · Hook for mounting and hanging up

4000

Lm

· Carrying handle

LED

50W

• Dimensions: Ø 280 x 260 mm



Li-lon

30000









ENERG*

Art. no. 130361

Tripod, height: 3 m



Ideal for illuminating building sites, especially building shells! The LED light strip can be simply suspended from the ceiling, e.g. with cable ties, and illuminates the work area evenly. Durable and unbreakable, and can be used without any annoying tripods. Can be stowed away as tidily and compact as a cable drum.

Adjustable cable clip with adhesive socket

Material: Polyamide 6.6, halogen-free, UL94V-2, for fast and secure attachment of the HUPlightStripes, all 0.5 m. With high-quality 3M adhesive pad (adhesive capacity 2 kg on smooth and grease-free surfaces), easy to open and close, reusable thanks to screw hole for drill attachment, colour: natural and black, dimensions: 90 x 12 mm, contents: 100 units





Art. no. 262192

Contents: 100 units | Natural



Art. no. 262193

Contents: 100 units | Black











LED light strip HUPlightStripe15

- Operating voltage: AC 220 240 V 50/60 Hz
- . Connected load: 180 W
- . Colour: neutral white 4000 K
- · 180 LEDs per metre
- Total length 15 m + connecting cable 2,5 m
- Can be extended up to 100 metres by means of plug or screw connections
- 120° radiation angle
- Colour rendering index CRI > 90
- · Brightness (luminous flux) 19500 Lm
- · Protection class 2
- · Also for use outdoors IP65
- · Light strip must be completely unrolled before use
- Dimensions light strip: W 16 mm x H 8 mm
- . Dimensions drum: W 286 mm x D 210 mm x H 338 mm







LED light strip HUPlightStripe25

- Operating voltage: AC 220 240 V 50/60 Hz
- . Connected load: 300 W
- . Colour: neutral white 4000 K
- · 180 LEDs per metre
- Total length 25 m + connecting cable 2,5 m
- Can be extended up to 100 metres by means of plug or screw connections
- · 120° radiation angle
- Colour rendering index CRI > 90
- · Brightness (luminous flux) 32500 Lm
- · Protection class 2
- · Also for use outdoors IP65
- · Light strip must be completely unrolled before use
- Dimensions light strip: W 16 mm x H 8 mm
- Dimensions drum: W 317 mm x D 250 mm x H 385 mm






LED Renovation Light HUPlightEasy

The Renovation Light HUPlightEasy is the quick, affordable, and uncomplicated solution for illuminating construction sites, vacant apartments, storage rooms, etc.

- · Impact-resistant polycarbonate housing
- · Spring clips
- · Lifespan 25,000 hours
- · Renovation light including built-in LED bulb with opal diffuser
- · Emits neutral white light
- · Beam angle of 160 degrees
- · 14 cm connection cable, hanger, and spring clip for easy and fast installation without tools
- · Lamp body made of impact-resistant polycarbonate and withstands fall heights of up to 2.5 m
- Suitable for use at temperatures from -20 to 45°C.

Note: Renovation light is NOT intended for installation in luminaries.

Contents: 5 pieces



5x







haupa.com





Deep-hole marker 2-in-1 with a sharpener

One pen - two functions

With a cap: Retractable pencil for precise marking and writing Without a cap: Deep-hole marker for drilling and installation tasks

- · Very stable, with a practical clip
- Sharpener integrated into the push-button
- Graphite universal refill for marking on rough and smooth surfaces
- · Ergonomic, triangular form
- Preserves resources and is environmentally-friendly
- Designed for various refills for almost all surfaces and materials
- Refill Leads Art. no. 150045

Art. no. 150044

155 mm



2in**1**



Refills, graphite universal

- Suitable for deep-hole marker Art.No. 150044
- · Refills in a dispenser, 6 units

Art. no. 150045

125 mm



Fitter's hammer with 3-component handle

Vibration-free fitter's hammer with 3-component handle.

The hammer head with the forged safety collar according to DIN 1041 and rubber protection sheath is secured mechanically in the handle with a heavy steel wedge. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this.

Benefits:

- · Shock-absorbing, therefore gentle on the joints
- · High-safety handle is indestructible
- . The handle is permanently connected to the
- · Non-slip handle allows ergonomic and safe work
- · Highest possible level of safety

Art. no. 180214

Weight 300 g



Art. no. 180218 Weight 500 g



Art. no. 180222 Weight 1000 g



Club hammer with 3-component handle

Vibration-free club hammer with 3-component high-safety handle.

The hammer head with the forged safety collar according to DIN 6475 and rubber protection sheath is secured mechanically in the handle with a heavy steel wedge. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this.

Benefits:

- · Shock-absorbing, therefore gentle on the joints
- · High-safety handle is indestructible
- The handle is permanently connected to the hammer head
- · Non-slip handle allows ergonomic and safe work
- · Highest possible level of safety









haupa.com







Soft-faced hammer with 3-component handle

Soft-faced hammer with 3-component high-safety handle and steel middle element.

Ideal for firm yet gentle hammering during installation work, alignment and attachment. White polyamide inserts are connected to the middle part by means of a dual-locking attachment system; this guarantees absolute safety at work. The inserts can be replaced and ordered separately. The high-safety handle comprises 3 components that are permanently connected to one another! The inner core is made of an aluminium alloy. A polyamide plastic (A2800) that is ultra-resistant to oils and solvents and also the non-slip rubber handle are moulded around this.

Note: Not recoil-free!

Benefits:

- · Shock-absorbing, therefore gentle on the joints
- · Dual-locking attachment system of the polyamide inserts
- · High-safety handle is indestructible
- The handle is permanently connected to the hammer head
- · Non-slip handle allows ergonomic and safe work
- · Highest possible level of safety

Art. no. 180336


Head Ø 32 mm

Art. no. 180338

Head Ø 40 mm





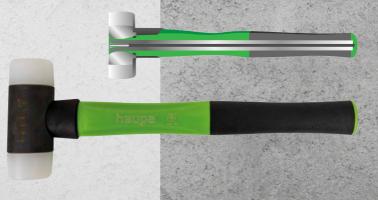

Plastic corrugated tube cutter

For cutting plastic corrugated protection tubes. Body made of magnesium pressure cast, very lightweight and durable.

Two cutting systems:

· Cross-section

with two four-blade knives. System with a service life that is four times longer, thanks to four-way adjustment of the blade of 90°. Tube guidance system for perfect positioning of the tube when cutting; blades lie protected in the body, which prevents damage of the blades and injury to the user.

· Longitudinal cut

with one four-blade knife. System with a service life that is four times longer, thanks to four-way adjustment of the blade of 90°. Blades lie protected in the body, which prevents damage of the blades and injury to the user. Tube contact surface for better guidance of the tube.

Art. no. 200208

14 - 45 mm





Saw handle for bi-metal saw blade

Ergonomic saw handle for flexible bi-metal saw blades. Specially designed for cutting at difficult-to-access places. Optionally, can be used with or without a guide bracket. Various application options (pistol handle and long model). Saw blades can be fitted and replaced without tools.

- Black handle made of high-quality plastic with a pleasant surface
- · Galvanised guide bracket
- · Knurled nut with a good grip for reliable holding of the saw blade
- Including 300mm bi-metal saw blade 24 Z / inch.



313 mm









Our PU cut-protection gloves are used to protect against mechanical risks, in accordance with EN 388 and EN 420. The "Hammer" pictogram defines the performance level of the product.

EN 388



Example:

Abrasion resistance
Cut resistance
Tear propagation strength
Penetration resistance















PU textile glove

Ideal for fine mechanical tasks and low mechanical loads

- · HPPE fibre
- Thin PU coating on palm and fingertips: Flexible and elastic, high abrasion resistance, safe grip
- · Excellent fit, pleasant wearing comfort
- Area of use: Warehouse and assembly work, fine mechanical tasks

Art. no. 120300/6

Size: 6

Art. no. 120300/7

Size: 7

8



Art. no. 120300/8

Size: 8

Art. no. 120300/9

Size: 9





Art. no. 120300/10

Size: 10

Art. no. 120300/11

Size: 11













PU cut-protection glove, level 3

For high mechanical loads, good cut-protection due to cut-resistance level 3

- HPPE fibre
- · PU coating on palm and fingertips: Flexible and elastic, high abrasion resistance, safe grip
- · Excellent fit, pleasant wearing comfort
- · Area of use: Warehousing and assembly work, fine mechanical tasks with slightly sharp objects



Art. no. 120302/9 Size: 9

Art. no. 120302/10

Size: 10





Art. no. 120302/11

Size: 11



PU cut-protection glove, level 5

High cut-protection thanks to cut-resistance level 5, for high mechanical loads

- · HPPF fibre
- Thick PU coating on palm and fingertips: Flexible and elastic, high abrasion resistance, safe grip
- · Excellent fit, pleasant wearing comfort
- · Area of use: Warehousing and assembly work, fine mechanical tasks with sharp objects



Art. no. 120304/9

Size: 9

Art. no. 120304/10

Size: 10



Art. no. 120304/11

Size: 11





haupa.com







Hand brush short

- · Soft Elaston PET bristles
- · Unvarnished wooden body
- 29 cm
- · Handle with hole for hanging up



Art. no. 393006

Metal dustpan with wooden handle

- · Made from metal
- · Wooden handle with hole for hanging up
- · Robust version
- · 450 x 230 mm



Bucket

- · Made from plastic
- 12 litres | 20 litres
- · With carry handle

Art. no. 300102

12 I

Art. no. 300115

20 I



Builders waste sack

- LDPE
- · Roll containing 5 sacks
- 751
- 100 my
- 575 x 1000 mm

Waste sack, extra

- I DPF
- · Roll containing 10 sacks
- · 120 I
- 50 my
- 700 x 1100 mm

Art. no. 393018

575 x 1000 mm, 5x



Art. no. 393020

700 x 1100 mm. 10x



Automatic lashing strap 3.5 m x 25 mm

Automatic lashing strap with claw hooks, 25 mm wide and 3.5 m long.

- · Easy to use, no threading into the ratchet necessary
- Lashing capacity (LC): 340 daN (direct) /680 daN (in the strapping)
- · 1 piece, claw hooks on both sides
- . Maximum length: 3.5 m
- Strap width: 25 mm; strap colour: light green
- · Complies with DIN EN 12195-2 for securing loads
- · Ideal for securing small loads
- · Hook material diameter: approx. 2 x 7 mm
- · Minimum length: 350 mm



340 daN, 25 mm | 3,5 m







haupa.com







HUPchemie 2025



Construction Glue HUPfix+

- · Extrem high initial adhesion
- · Bond cabel-crunks, distriubution-boxes and bables to walls, wood and metal
- · No retaining of the to be bonded parts at overhead and vertical places
- Paintable







naupa

Application HUPFix+:


sectors, building, furniture manuracture, container construction, metal work, machinery, air conditionioning, yacht/boat construction, body-work, vessel construction and construction of window and door frames. Suitable in applications where silicones can not be used. An adhesive with a grab and bond strength so good it can be classed as the ultimate performance adhesive.

With HUPfix+ it is possible to glue heavy materials like cables



The materials which needs to be glued, must be clean, free of oil and grease. Apply the **HUPfix+** on one side, place the material to be glued together and press firm. Direct adhesion. Skinning time after 10 till 20 minutes. Curing 3 mm/24 hours. Shelf life: 12 months. Temperature resistance: -40 till +100°C (130°C short-term up to 2-3 hours). Application temperature: +5 till +40°C.





· for processing silicone and polymer cartridges

Art. no. 170254

for 310 ml cartridges













HUPsuperglue

- · Super-glue from cyanoacrylate
- · For high-strength bonding of metals and plastic combinations

haupa

Low-viscosity



20 g



How to use HUPsuperglue:

The surfaces must be clean and free of oil or grease.

Apply a thin layer of **HUPsuperglue** to one side and join the parts.

Water-based lubricants and slip agents



Art. no. 143344

500 ml



Art. no. 143345

1.000 ml

Application:
This prevents 80% of friction and facilitates cable laying through excellent slippage in every situation. As soon as the water is evaporated, the main part of the lubricant remains und ensures that old cables can easily be pulled out and new ones inserted,

Marking Paint HUPmark

- · Luminous red/luminous yellow/luminous pink
- · High luminosity and opacity
- · Work in any position
- · Fast-drying, abrasion- and weather-resistant





Application HUPmark:

The area to by sprayed must be dry, clean and grease-free. Bring the can up to room temperature. Before use and after each pause in spraying, shake well until the mixing ball moves freely. After use, spray out upside down.

Properties:

Marking spray for industrial, craft, construction and mining etc. For fast, clean and permanent marking of: Cement, wood, masonry, metal, asphalt, soil, plaster, glass, ceramics etc. For labelling and marking of: Pavements and roads, construction measures, breakthroughs, pipe and cable ducts, free from heavy metals, lead and cadmium, dries quickly and is friction and waterproof











Anti-Friction-Coating HUPcable

- · Easy pulling of cables into hoses
- · Extreme friction reduction
- Save up to 50% of time and force

Art. no. 170174

400 ml





Spray the prepared cable. Wait for the propellant gas to evaporate (a few seconds) then pull in the cable.

Properties:



Kabel-Gleitmittel **Anti-Friction Coating**

HUPcable

- Leichtes Einziehen von Kabeln
- Extreme Reduktion der Reibung
- Spart bis zu 50% Zeit und Kraft
- Easy Pulling of Cables into Hoses
- * Extreme Friction Reduction
- * Save up to 50% of Time and Force

Inhalt / content: 400 ml 520 3





181

Contact spray HUPwetBlock

- · Protection of all kind of electrical contacts against moisture
- · Blocks wet
- · Long time elemination of creeping current and oxidation

Art. no. 170180

400 ml







haupa

Kontakt-Spray **Contact-Spray HUPwetBlock**

- Schützt alle Arten von elektrischen Kontakten vor Feuchtigkeit
- · Verdrängt Nässe
- Verhindert dauerhaft und zuverlässig Kriechströme und Oxidation
- * Protection of all kind of Electrical Contacts against moisture
- Blocks Wet
- 'long Time Elemination of Creeping Owent and Oxidation

Inhalt / content: 400 ml [520] 3e

Application HUPwetBlock:

The product properties remain even after several months of use indoors and also outdoor and prevent permanent leakage currents and short circuits in: lighting systems, connections and sockets, electrical machinery and equipment, pumps,















Smoke-Detector-Test-Spray HUPdetect

- · Simultated fire smoke
- · About 150 to 200 test operations
- · Fast and relaible



Art. no. 170404

200 ml



Application HUPdetect

Properties:

- directly simulated fire smokeenough for about 150-200 test operations

Fast degreaser HUPdegreaser

- · Intensive cleaner and degreaser
- · Removes dust, dirt, oil and grease
- · Residue-free and fast evaporation



500 ml



HUPdegreaser



Application HUPdegreaser:

For cleaning and degreasing of dust, dirt, oil, mechanical parts. For removing wax-stains, fats and resins from high potential

Properties:

HUPdegreaser is a quick and intensive degreaser and cleaner for mechanical and electrical equipment. Residue-free and fast













